

APC Back-UPS Pro, 1300VA/780W, Tower, 230V, 8x IEC C13 outlets, AVR, LCD, User Replaceable Battery

Brand : APC

Product code: BR1300MI

Product name : Back-UPS Pro, 1300VA/780W, Tower, 230V, 8x IEC C13 outlets, AVR, LCD, User Replaceable Battery

Back-UPS Pro, 1300VA/780W, Tower, 230V, 8x IEC C13 outlets, AVR, LCD, User Replaceable Battery



APC Back-UPS Pro, 1300VA/780W, Tower, 230V, 8x IEC C13 outlets, AVR, LCD, User Replaceable Battery:

This APC Back-UPS Pro offers premium power protection for high performance computer systems, routers/modems, external storage devices, game consoles and other electronics in your home or business. The 1300VA tower UPS has 8 total outlets, 6 of which are battery back up and surge protection, and 2 that are surge protection only. It has a surge energy rating of 509 Joules. This UPS is UL1778 Listed. Its dimensions are 25 x 10 x 38.2 cm and 11.85 kg. The Back-UPS Pro family offers guaranteed power protection for high-performance computer systems, routers, external storage devices, game consoles, and other home and business electronics. This UPS has a 2-year warranty and CE product certification. It is compatible with a dedicated user-replaceable battery, and the APC replacement battery cartridge helps restore UPS performance to the original specifications.



Features		Design	
UPS topology *	Line-Interactive	Form factor *	Tower
Output power capacity *	1.3 kVA	Cable length	1.83 m
Output power *	780 W	Cooling type	Passive
Waveform *	Sine	Product colour *	Black
Input operation voltage (min) *	176 V	Display type	LCD
Input operation voltage (max) *	294 V	LED indicators	✓
Input frequency *	50/60 Hz	Certification	A-tick, C-tick, CE, EAC, GS Mark, RCM, TISI
Output frequency	50/60 Hz	Operational conditions	
Automatic Voltage Regulation (AVR) *	✓	Operating temperature (T-T)	0 - 40 °C
Maximum current	10 A	Storage temperature (T-T)	-15 - 45 °C
Surge energy rating	509 J	Operating relative humidity (H-H)	0 - 95%
ECO mode	✓	Storage relative humidity (H-H)	0 - 95%
Noise level	45 dB	Operating altitude	0 - 3000 m
Surge protection	✓	Non-operating altitude	0 - 15000 m
Surge protection features	Network	Technical details	
Audible alarm(s)	✓	Sustainability certificates	Green Premium
Audible alarm modes	Alarm when on battery, Low battery alarm, Overload alarm	Weight & dimensions	
Ports & interfaces		Width	250 mm
AC outlet types	C13 coupler	Depth	382 mm
Power plug	C14 coupler	Height	100 mm
AC outlets quantity	8 AC outlet(s)	Weight	10.2 kg
USB port	✓	Package width	485 mm
USB 2.0 ports quantity	1	Package depth	225 mm
Ethernet LAN (RJ-45) ports	2	Package height	330 mm
Cabling technology	10/100/1000Base-T(X)	Package weight	11.8 kg

Battery		Packaging data	
Battery technology	Sealed Lead Acid (VRLA)	Cables included	USB cable
Battery life (max)	5 year(s)	Manual	✓
Battery recharge time	16 h	Logistics data	
Hot-swap battery	✓	Harmonized System (HS) code	85078000
Automatic battery test	✓	Other features	
Cold start	✓	Nominal output voltage	230 V
		Nominal input voltage	230 V

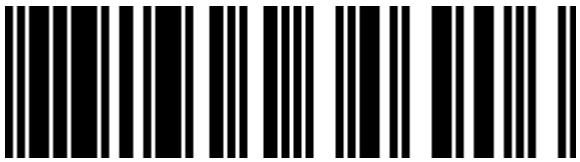

731304346906

0731304346906

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.