

Bowers & Wilkins

600 Series
700 Series



603 S3



The 603 S3 is the largest loudspeaker in the 600 Series and is ideal for larger rooms and home theatres. It combines our new Titanium Dome™ tweeter with the accuracy and transparency of our acclaimed Continuum™ cone FST™ midrange driver.

Technical features	Decoupled Double Dome Titanium tweeter Continuum™ cone FST™ midrange Paper bass cones Flowport™	
Description	3-way vented-box system	
Drive units	1x ø25mm (1 in) Titanium Dome high-frequency 1x ø150mm (6 in) Continuum cone FST midrange 2x ø165mm (6.5 in) Paper bass cone	
Frequency range	-6dB 29Hz - 33kHz	
Frequency response (+/-3dB from reference axis)	46Hz - 28kHz ±3dB	
Sensitivity (on axis at 2.83Vrms at 1m)	90dB	
Harmonic distortion	2nd and 3rd harmonics (90dB, 1m on axis) <1% 100Hz - 22kHz <0.5% 350Hz - 12kHz	
Nominal impedance	8Ω (minimum 3.0Ω)	
Recommended amplifier power	30W - 200W into 8Ω on unclipped programme	
Max. recommended cable impedance	0.1Ω	
Dimensions	Height: 985 mm (38.8 in) cabinet only 1,020 mm (40.2 in) including plinth Width: 190 mm (7.5 in) cabinet only 260 mm (10.2 in) including plinth Depth: 340 mm (13.4 in) cabinet only 368 mm (14.5 in) including grille and terminals 402 mm (15.8 in) including plinth	
Net weight	27.5kg (60.6lbs)	
Finishes	Cabinet: Black White Oak	Grille: Black Grey Grey



606 S3



The 606 S3 stand-mount speaker provides the ideal combination of size and performance. It combines our all-new Titanium Dome™ tweeter with the powerful accuracy and transparency of our acclaimed Continuum™ bass/midrange cone. Taking the award-winning 606 formula and evolving it, the 606 S3 is now even more appealing to even more music lovers.



Technical features

Decoupled Double Dome Titanium tweeter
Continuum™ cone bass/midrange
Flowport™

Description

2-way vented-box system

Drive units

1x ø25mm (1 in) Titanium Dome
high-frequency
1x ø165mm (6.5 in) Continuum cone bass/midrange

Frequency range

-6dB 40Hz - 33kHz

Frequency response

(+/-3dB from reference axis)

52Hz - 28kHz ±3dB

Sensitivity

(on axis at 2.83Vrms at 1m)

88dB

Harmonic distortion

2nd and 3rd harmonics
(90dB, 1m on axis)
<1% 100Hz - 22kHz
<0.5% 150Hz - 12kHz

Nominal impedance

8Ω (minimum 3.7Ω)

Recommended amplifier power

30W - 120W into 8Ω on
unclipped programme

Max. recommended cable impedance

0.1Ω

Dimensions

344 mm (13.6 in) cabinet only

189 mm (7.4 in) cabinet only

300 mm (11.8 in) cabinet only

328 mm (12.9 in) including grille
and terminals

Net weight

7.05kg (15.5lbs)

Finishes

Cabinet:
Black
White
Oak

Grille:
Black
Grey
Grey

607 S3



Offering power and scale that belies its compact form, the 607 S3 bookshelf speaker combines our new Titanium Dome™ tweeter with the accuracy and transparency of our acclaimed Continuum™ bass/midrange cone. Ideal for smaller spaces, the inclusion of the same game-changing technologies as its siblings means the 607 S3 is perfect for enjoying music or providing surround sound in home theatre systems.

Technical features	Decoupled Double Dome Titanium tweeter Continuum™ cone bass/midrange Flowport™	
Description	2-way vented-box system	
Drive units	1x ø25mm (1 in) Titanium Dome high-frequency 1x ø130mm (5 in) Continuum cone bass/midrange	
Frequency range	-6dB 40Hz - 33kHz	
Frequency response (+/-3dB from reference axis)	52Hz - 28kHz ±3dB	
Sensitivity (on axis at 2.83Vrms at 1m)	84dB	
Harmonic distortion	2nd and 3rd harmonics (90dB, 1m on axis) <1% 100Hz - 22kHz <0.5% 500Hz - 10kHz	
Nominal impedance	8Ω (minimum 3.0Ω)	
Recommended amplifier power	30W - 100W into 8Ω on unclipped programme	
Max. recommended cable impedance	0.1Ω	
Dimensions	Height: 300 mm (11.8 in) cabinet only	
	Width: 165 mm (6.5 in) cabinet only	
	Depth: 207 mm (8.2 in) cabinet only	
	235 mm (9.3 in) including grille and terminals	
Net weight	4.65kg (10.3lbs)	
Finishes	Cabinet: Black White Oak	Grille: Black Grey Grey



HTM6 S3



The HTM6 S3 is small enough to fit into convenient spaces in your home but mighty enough to partner with the floorstanding 603 S3. It combines our all-new Titanium Dome™ tweeter with the powerful accuracy and transparency of twin Continuum™ bass/midrange cones. Celebrate clarity with the HTM6 S3 centre channel speaker.



Technical features	Decoupled Double Dome Titanium tweeter Continuum™ cone bass/midrange Flowport™
Description	2-way vented-box system
Drive units	1x ø25mm (1 in) Titanium Dome high-frequency 2x ø130mm (5 in) Continuum cone bass/midrange
Frequency range	-6dB 42Hz - 33kHz
Frequency response (+/-3dB from reference axis)	72Hz - 28kHz ±3dB
Sensitivity (on axis at 2.83Vrms at 1m)	87dB
Harmonic distortion	2nd and 3rd harmonics (90dB, 1m on axis) <1% 100Hz - 22kHz <0.5% 120Hz - 12kHz
Nominal impedance	8Ω (minimum 4.3Ω)
Recommended amplifier power	30W - 120W into 8Ω on unclipped programme
Max. recommended cable impedance	0.1Ω
Dimensions	160 mm (6.3 in) cabinet only 480 mm (18.9 in) Cabinet only 255 mm (10 in) Cabinet only 283 mm (11.2 in) including grille and terminals
Net weight	7.7kg (17.0lbs)
Finishes	Cabinet: Black White Oak Grille: Black Grey Grey

702 S3



702 S3's Carbon Dome tweeter is housed in an all-new Solid Body Tweeter assembly, while with its new downward-firing port configuration and trio of Aerofoil Profile bass cones, it delivers bass that's both profoundly deep and endlessly articulate.

Technical features

Decoupled Carbon Dome tweeter
Solid Body Tweeter-on-Top
Continuum™ cone FST™ midrange
Decoupled midrange
Aerofoil™ Profile bass cones
Flowport™

Description

3-way vented-box system

Drive units

1x ø25mm (1 in) Decoupled Carbon Dome high-frequency
1x ø150mm (6 in) Continuum cone FST midrange
3x ø165mm (6.5 in) Aerofoil Profile bass

Frequency range

28Hz to 33kHz

Frequency response

(+/-3dB from reference axis)

46Hz - 28kHz

Sensitivity

(on axis at 2.83Vrms at 1m)

90dB

Harmonic distortion

2nd and 3rd harmonics (90dB, 1m on axis)
<1% 86Hz - 28kHz
<0.5% 110Hz - 20kHz

Nominal impedance

8Ω (minimum 3.1Ω)

Recommended amplifier power

30W - 300W into 8Ω on unclipped programme

Max. recommended cable impedance

0.1Ω

Dimensions

Height: 1010mm (39.8 in) cabinet only
1138mm (44.8 in) including tweeter and plinth

Width: 192mm (7.6 in) cabinet only
290mm (11.4 in) including plinth

Depth: 354mm (13.9 in) cabinet only
391mm (15.4 in) including grille and terminals
410mm (16.1 in) including plinth


Net weight

33.5kg (73.8lbs)

Finishes

Cabinet: Gloss black
Satin white
Mocha
Rosenuit (APAC only)

Grille: Black
Grey (Satin White only)

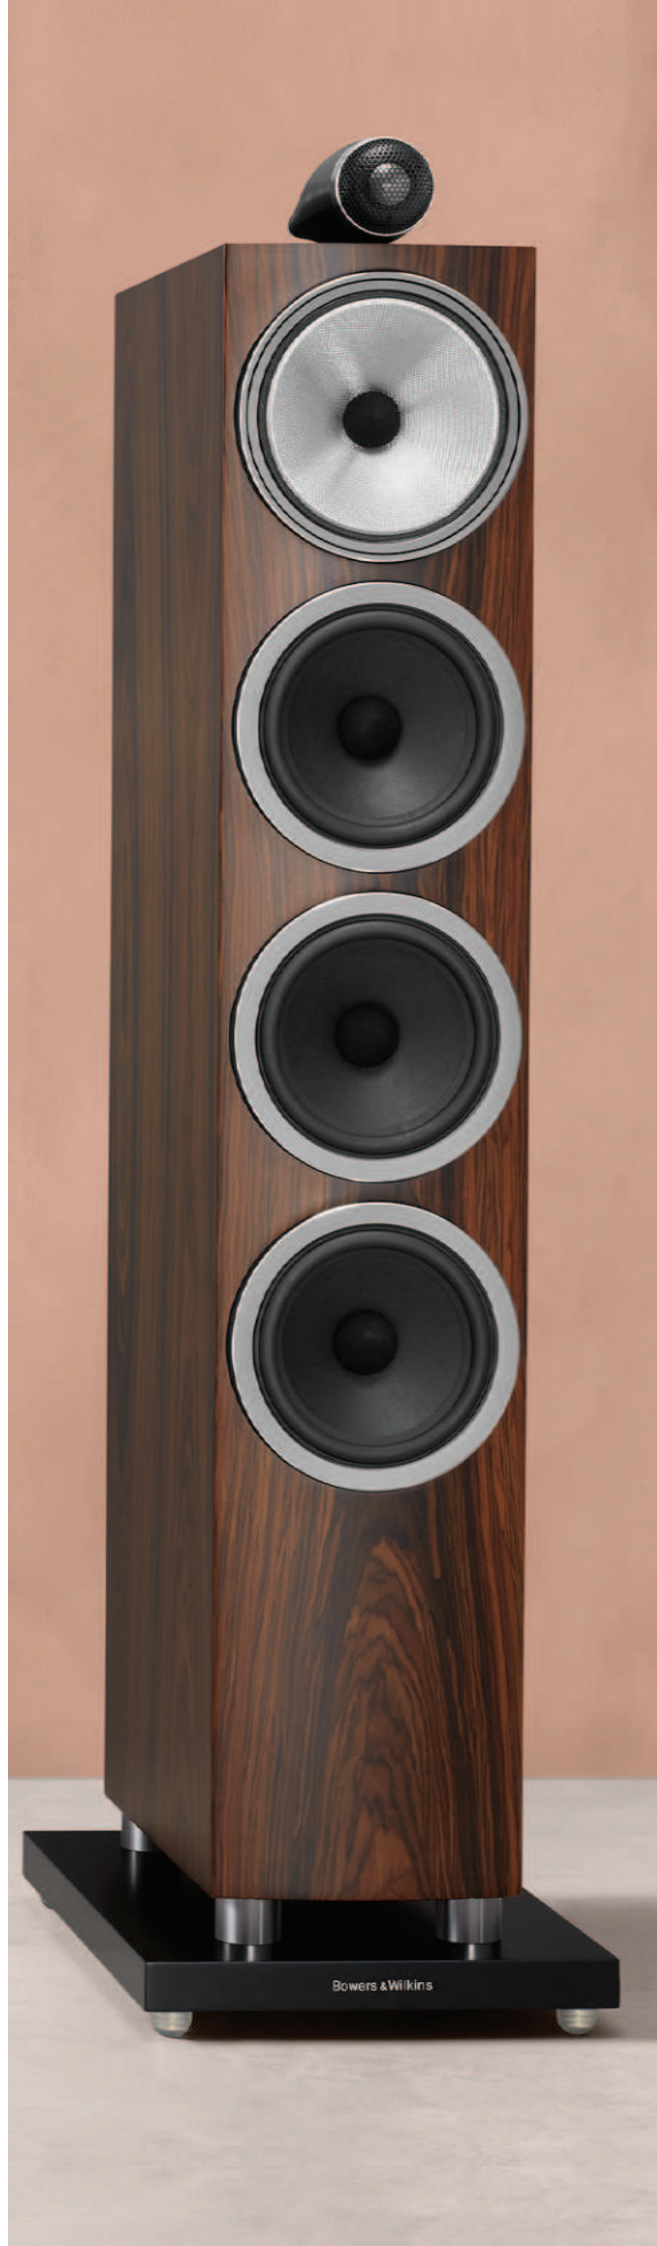

Bowers & Wilkins

703 S3



The new 703 S3 now features our iconic Tweeter-on-Top configuration for the first time, alongside a decoupled FST™ Continuum cone midrange driver – enhanced by the addition of our revolutionary new Biomimetic Suspension – and twin Aerofoil Profile bass drivers.



Technical features

Decoupled Carbon Dome tweeter
Solid Body Tweeter-on-Top
Continuum™ cone FST™ midrange
Decoupled midrange
Aerofoil™ Profile bass cones
Flowport™

Description

3-way vented-box system

Drive units

1x ø25mm (1 in) Decoupled Carbon Dome high-frequency
1x ø150mm (6 in) Continuum cone FST midrange
2x ø165mm (6.5 in) Aerofoil profile bass

Frequency range

30Hz to 33kHz

Frequency response

(+/-3dB from reference axis)

46Hz - 28kHz

Sensitivity

(on axis at 2.83Vrms at 1m)

90dB

Harmonic distortion

2nd and 3rd harmonics (90dB, 1m on axis)
<1% 90Hz - 22kHz
<0.5% 120Hz - 20kHz

Nominal impedance

8Ω (minimum 3.1Ω)

Recommended amplifier power

30W - 200W into 8Ω on unclipped programme

Max. recommended cable impedance

0.1Ω

Dimensions

Height: 1010mm (39.8 in) cabinet only
1117mm (44 in) including tweeter and plinth

Width: 192mm (7.6 in) cabinet only
290mm (11.4 in) including plinth

Depth: 316mm (12.4 in) cabinet only
353mm (13.9 in) including grille and terminals
372mm (14.6 in) including plinth

Net weight

28.8kg (63.5lbs)

Finishes

Cabinet: Gloss black
Satin white
Mocha
Rosnut (APAC only)

Grille: Black
Grey (Satin White only)

704 S3



The slimmest floor-standing loudspeaker Bowers & Wilkins makes, 704 S3 still packs a mighty punch. Its twin Aerofoil Profile bass drivers ensure ample extension and scale, while its decoupled Continuum cone FST™ driver delivers crystal clear midrange performance.

Technical features	Decoupled Carbon Dome tweeter Continuum™ cone FST™ midrange Decoupled midrange Aerofoil™ Profile bass cones Flowport™
Description	3-way vented-box system
Drive units	1x ø25mm (1 in) Decoupled Carbon Dome high-frequency 1x ø130mm (5 in) Continuum cone FST midrange 2x ø130mm (5 in) Aerofoil profile bass
Frequency range	43Hz to 33kHz
Frequency response (+/-3dB from reference axis)	48Hz - 28kHz
Sensitivity (on axis at 2.83Vrms at 1m)	88dB
Harmonic distortion	2nd and 3rd harmonics (90dB, 1m on axis) <1% 100Hz - 22kHz <0.5% 300Hz - 20kHz
Nominal impedance	8Ω (minimum 3.1Ω)
Recommended amplifier power	30W - 150W into 8Ω on unclipped programme
Max. recommended cable impedance	0.1Ω
Dimensions	Height: 925mm (36.4 in) cabinet only 964mm (38 in) including tweeter and plinth Width: 165mm (6.5 in) cabinet only 252mm (9.9 in) including plinth Depth: 263mm (10.4in) cabinet only 300mm (11.8 in) including grille and terminals 321mm (12.6 in) including plinth
Net weight	20.5kg (45.3lbs)
Finishes	Cabinet: Gloss black Satin white Mocha Rosenut (APAC only) Grille: Black Grey (Satin White only)



705 S3



705 S3's Carbon Dome tweeter is housed in a Solid Body Tweeter-on-Top enclosure evolved from the latest generation of 800 Series Diamond. That joins a new and subtly curved baffle endowed with an all-new 'pod' housing for its Continuum Cone bass/midrange driver.



Technical features

Decoupled Carbon Dome tweeter
Solid Body Tweeter-on-Top
Continuum™ cone bass / midrange
Flowport™

Description

2-way vented-box system

Drive units

1x ø25mm (1 in) Decoupled Carbon Dome high-frequency
1x ø165mm (6.5 in) Continuum cone bass / midrange

Frequency range

45Hz to 33kHz

Frequency response

(+/-3dB from reference axis)

50Hz - 28kHz

Sensitivity

(on axis at 2.83Vrms at 1m)

88dB

Harmonic distortion

2nd and 3rd harmonics (90dB, 1m on axis)
<1% 100Hz - 22kHz
<0.5% 150Hz - 20kHz

Nominal impedance

8Ω (minimum 3.7Ω)

Recommended amplifier power

30W - 120W into 8Ω on unclipped programme

Max. recommended cable impedance

0.1Ω

Dimensions

Height: 345mm (13.6 in) cabinet only
413mm (16.3 in) including tweeter
Width: 192mm (7.6 in) cabinet only
Depth: 297mm (11.7 in) cabinet only
337mm (13.3 in) including grille and terminals

Net weight

9.6kg (21.1lbs)

Finishes

Cabinet: Gloss black
Satin white
Mocha
Rosenut (APAC only)
Grille: Black
Grey (Satin White only)

706 S3



Thanks to 706 S3's decoupled Carbon Dome tweeter and carefully upgraded crossover, it provides exceptional detail and insight into your music, while its substantial 165mm (6.5in) Continuum Cone bass/midrange drive unit provides ample scale and extension for use in larger spaces.

Technical features	Decoupled Carbon Dome tweeter Continuum™ cone bass / midrange Flowport™
Description	2-way vented-box system
Drive units	1x ø25mm (1 in) Decoupled Carbon Dome high-frequency 1x ø165mm (6.5 in) Continuum cone bass / midrange
Frequency range	45Hz to 33kHz
Frequency response (+/-3dB from reference axis)	50Hz - 28kHz
Sensitivity (on axis at 2.83Vrms at 1m)	88dB
Harmonic distortion	2nd and 3rd harmonics (90dB, 1m on axis) <1% 100Hz - 22kHz <0.5% 150Hz - 20kHz
Nominal impedance	8Ω (minimum 3.7Ω)
Recommended amplifier power	30W - 120W into 8Ω on unclipped programme
Max. recommended cable impedance	0.1Ω
Dimensions	Height: 345mm (13.6 in) cabinet only Width: 192mm (7.6 in) cabinet only Depth: 297mm (11.7 in) cabinet only 334mm (13.1 in) including grille and terminals
Net weight	8.4kg (18.6lbs)
Finishes	Cabinet: Gloss black Satin white Mocha Rosenuit (APAC only) Grille: Black Grey (Satin White only)



707 S3



707 S3's space friendly design makes it easy to accommodate in smaller spaces, but thanks to its Carbon Dome tweeter, Continuum cone mid-bass and curved baffle, this outstanding loudspeaker provides proof positive that often, size can be deceptive.

Technical features

Decoupled Carbon Dome tweeter
Continuum™ cone bass / midrange
Flowport™

Description

2-way vented-box system

Drive units

1x ø25mm (1 in) Decoupled Carbon Dome high-frequency
1x ø130mm (5 in) Continuum cone bass / midrange

Frequency range

45Hz to 33kHz

Frequency response

(+/-3dB from reference axis)

50Hz - 28kHz

Sensitivity

(on axis at 2.83Vrms at 1m)

84dB

Harmonic distortion

2nd and 3rd harmonics (90dB, 1m on axis)
<1% 110Hz - 22kHz
<0.5% 150Hz - 20kHz

Nominal impedance

8Ω (minimum 4.0Ω)

Recommended amplifier power

30W - 100W into 8Ω on unclipped programme

Max. recommended cable impedance

0.1Ω

Dimensions

Height: 300mm (11.8in) cabinet only
Width: 165mm (6.5 in) cabinet only
Depth: 247mm (9.7 in) cabinet only
284mm (11.2 in) including grille and terminals

Net weight

6.2kg (13.6lbs)

Finishes

Cabinet: Gloss black
Satin white
Mocha
Rosenut (APAC only)
Grille: Black
Grey (Satin White only)

Bowers & Wilkins

HTM71 S3



Our flagship centre-channel speaker features a Carbon Dome drive unit housed in a Tweeter-On-Top enclosure, a 130mm (5in) Continuum Cone FST™ midrange driver – particularly important for clarity with dialogue – and twin Aerofoil™ Profile bass cones. It's the perfect partner for the 705 S3, 703 S3 and 702 S3.

Technical features	Decoupled Carbon Dome tweeter Solid Body Tweeter-on-Top Continuum™ cone FST midrange Aerofoil™ Profile bass cones Flowport™
Description	3-way vented-box system
Drive units	1x ø25mm (1 in) Decoupled Carbon Dome high-frequency 1x ø130mm (5 in) Continuum cone FST midrange 2x ø130mm (5 in) Aerofoil Profile bass
Frequency range	45Hz to 33kHz
Frequency response (+/-3dB from reference axis)	50Hz - 28kHz
Sensitivity (on axis at 2.83Vrms at 1m)	89dB
Harmonic distortion	2nd and 3rd harmonics (90dB, 1m on axis) <1% 90Hz - 22kHz <0.5% 120Hz - 20kHz
Nominal impedance	8Ω (minimum 3.0Ω)
Recommended amplifier power	30W - 200W into 8Ω on unclipped programme
Max. recommended cable impedance	0.1Ω
Dimensions	Height: 165mm (6.5 in) cabinet only 233mm (9.2 in) including tweeter Width: 628mm (24.7 in) cabinet only Depth: 318mm (12.5 in) cabinet only 356mm (14 in) including grille and terminals
Net weight	17.5kg (38.5lbs)
Finishes	Cabinet: Gloss black Satin white Mocha Rosenut (APAC only) Grille: Black Grey (Satin White only)



HTM72 S3



HTM72 S3 is the more compact centre-channel speaker in the new 700 Series. It features a Carbon Dome tweeter and twin Continuum cone Mid/Bass drivers. It's the perfect partner for a home theatre system based around the 704 S3, 706 S3 or 707 S3.

Technical features

Decoupled Carbon Dome tweeter
Continuum™ cone bass / midrange
Flowport™

Description

2-way vented-box system

Drive units

1x ø25mm (1 in) Decoupled Carbon Dome high-frequency
2x ø130mm (4 in) Continuum cone bass / midrange

Frequency range

48Hz to 33kHz

Frequency response

(+/-3dB from reference axis)

70Hz - 28kHz

Sensitivity

(on axis at 2.83Vrms at 1m)

87dB

Harmonic distortion

2nd and 3rd harmonics (90dB, 1m on axis)
<1% 100Hz - 22kHz
<0.5% 200Hz - 22kHz

Nominal impedance

8Ω (minimum 4.3Ω)

Recommended amplifier power

30W - 120W into 8Ω on unclipped programme

Max. recommended cable impedance

0.1Ω

Dimensions

Height: 165mm (6.5 in) cabinet only

Width: 477mm (18.8 in) cabinet only

Depth: 266mm (10.5 in) cabinet only
302mm (11.9 in) including grille and terminals

Net weight

9.7kg (21.3lbs)

Finishes

Cabinet: Gloss black
Satin white
Mocha
Rosenut (APAC only)

Grille: Black
Grey (Satin White only)







702 S3 Signature



Engineered for pristine studio-quality sound at home, the 702 S3 Signature utilises upgraded midrange and low-frequency motor systems, improved capacitors, revised speaker terminals, plus a more open tweeter grille mesh, as developed for our 800 Series Signature loudspeakers.



Technical features	Decoupled Carbon Dome tweeter Solid Body Tweeter-on-Top Continuum™ cone FST™ midrange Decoupled midrange Aerofoil™ Profile bass cones Flowport™
Description	3-way vented-box system
Drive units	1x ø25mm (1in) Decoupled Carbon Dome high-frequency 1x ø150mm (6 in) Continuum cone FST midrange 3x ø165mm (6.5 in) Aerofoil profile bass
Frequency range	-6dB 28Hz - 33kHz
Frequency response (+/-3dB from reference axis)	46Hz - 28kHz ±3dB
Sensitivity (on axis at 2.83Vrms at 1m)	90dB
Harmonic distortion	2nd and 3rd harmonics (90dB, 1m on axis) <1% 86Hz - 28kHz <0.5% 110Hz - 20kHz
Nominal impedance	8Ω (minimum 3.1Ω)
Recommended amplifier power	30W - 200W into 8Ω on unclipped programme
Max. recommended cable impedance	0.1Ω
Dimensions	Height: 1010mm (39.8 in) cabinet only 1138mm (44.8 in) including tweeter and plinth Width: 192mm (7.6 in) cabinet only 290mm (11.4 in) including plinth Depth: 354mm (13.9 in) cabinet only 410mm (16.1 in) including plinth 391mm (15.4 in) including grille and terminals
Net weight	35.26kg (77.7lbs)
Finishes	Cabinet: Datuk Gloss Midnight Blue Metallic Grille: Black

705 S3 Signature



Featuring optimised technology from our most advanced loudspeakers, as well as our proprietary Continuum mid-bass drive unit and Tweeter-on-Top, the 705 S3 Signature utilises an upgraded mid-bass motor system, improved capacitors, revised speaker terminals, plus a more open tweeter grille mesh, as developed for our 800 Series Signature loudspeakers.

Technical features

Decoupled Carbon Dome tweeter
Solid Body Tweeter-on-Top
Continuum™ cone bass / Flowport™

Description

2-way vented-box system

Drive units

1x ø25mm (1 in) Decoupled Carbon Dome high-frequency
1x ø165mm (6.5 in) Continuum cone / midrange

Frequency range

- 6dB 45Hz to 33kHz

Frequency response

(+/-3dB from reference axis)

50Hz - 28kHz ±3dB

Sensitivity

(on axis at 2.83Vrms at 1m)

88dB

Harmonic distortion

2nd and 3rd harmonics (90dB, 1m on axis)
<1% 100Hz - 22kHz
<0.5% 150Hz - 20kHz

Nominal impedance

8Ω (minimum 3.7Ω)

Recommended amplifier power

30W - 120W into 8Ω on unclipped programme

Max. recommended cable impedance

0.1Ω

Dimensions

Height: 345mm (13.5 in) cabinet only
413mm (16.3 in) including tweeter
Width: 192mm (7.6in) cabinet only
Depth: 297mm (11.7in) cabinet only
337mm (13.3 in) including grille and terminals

Net weight

10.35kg (22.8lbs)

Finishes

Cabinet: Datuk Gloss
Midnight Blue Metallic
Grille: Black



HTM71 S3 Signature



HTM71 S3 Signature features optimised technologies, such as our proprietary decoupled Continuum midrange drive unit and Tweeter-on-Top, plus upgraded bass motor systems, improved capacitors, revised speaker terminals, and a more open tweeter grille mesh, as developed for our 800 Series Signature loudspeakers.

Technical features

Decoupled Carbon Dome tweeter
Solid Body Tweeter-on-Top
Continuum™ cone FST midrange
Aerofoil™ Profile bass cones
Flowport™

Description

3-way vented-box system

Drive units

1x ø25mm (1 in) Decoupled Carbon Dome high-frequency
1x ø130mm (5 in) Continuum cone FST midrange
2x ø130mm (5 in) Aerofoil Profile bass

Frequency range

- 6dB 45Hz to 33kHz

Frequency response

(+/-3dB from reference axis)

50Hz - 28kHz ±3dB

Sensitivity

(on axis at 2.83Vrms at 1m)

89dB

Harmonic distortion

2nd and 3rd harmonics (90dB, 1m on axis)
<1% 90Hz - 22kHz
<0.5% 120Hz - 20kHz

Nominal impedance

8Ω (minimum 3.0Ω)

Recommended amplifier power

30W - 200W into 8Ω on unclipped programme

Max. recommended cable impedance

0.1Ω

Dimensions

Height: 165mm (6.5 in) cabinet only
233mm (9.2 in) including tweeter
Width: 628mm (24.7 in) cabinet only
Depth: 318mm (12.5 in) cabinet only
356mm (14 in) including grille and terminals

Net weight

18.5kg (40.8lbs)

Finishes

Cabinet: Datuk Gloss
Midnight Blue Metallic

Grille: Black



Specifications

	702 S3	703 S3	704 S3
Technical features	Decoupled Carbon Dome tweeter Solid Body Tweeter-on-Top Continuum™ cone FST™ midrange Decoupled midrange Aerofoil™ Profile bass cones Flowport™	Decoupled Carbon Dome tweeter Solid Body Tweeter-on-Top Continuum™ cone FST™ midrange Decoupled midrange Aerofoil™ Profile bass cones Flowport™	Decoupled Carbon Dome tweeter Solid Body Tweeter-on-Top Continuum™ cone FST™ midrange Decoupled midrange Aerofoil™ Profile bass cones Flowport™
Description	3-way vented-box system	3-way vented-box system	3-way vented-box system
Drive units	1x ø25mm (1in) Decoupled Carbon Dome high-frequency 1x ø150mm (6in) Continuum cone FST midrange 3x ø165mm (6.5in) Aerofoil Profile bass	1x ø25mm (1in) Decoupled Carbon Dome high-frequency 1x ø150mm (6 in) Continuum cone FST midrange 2x ø165mm (6.5 in) Aerofoil profile bass	1x ø25mm (1in) Decoupled Carbon Dome high-frequency 1x ø130mm (5in) Continuum cone FST / midrange 2x ø130mm (5 in) Aerofoil profile bass
Frequency range	28Hz to 33kHz	30Hz to 33kHz	43Hz to 33kHz
Frequency response (+/-3dB from reference axis)	46Hz - 28kHz	46Hz - 28kHz	48Hz - 28kHz
Sensitivity (on axis at 2.83Vrms at 1m)	90dB	90dB	88dB
Harmonic distortion	2nd and 3rd harmonics (90dB, 1m on axis) <1% 86Hz - 28kHz <0.5% 110Hz - 20kHz	2nd and 3rd harmonics (90dB, 1m on axis) <1% 90Hz - 22kHz <0.5% 120Hz - 20kHz	2nd and 3rd harmonics (90dB, 1m on axis) <1% 100Hz - 22kHz <0.5% 300Hz - 20kHz
Nominal impedance	8Ω (minimum 3.1Ω)	8Ω (minimum 3.1Ω)	8Ω (minimum 3.1Ω)
Recommended amplifier power	30W - 300W into 8Ω on unclipped programme	30W - 200W into 8Ω on unclipped programme	30W - 150W into 8Ω on unclipped programme
Max. recommended cable impedance	0.1Ω	0.1Ω	0.1Ω
Dimensions	<i>Height:</i> 1010mm cabinet only 1138mm including tweeter and plinth <i>Width:</i> 192mm cabinet only 290mm including plinth <i>Depth:</i> 297mm cabinet only 391mm including grille and terminals	1010mm cabinet only 1117mm including tweeter and plinth 192mm cabinet only 290mm including plinth 316mm cabinet only 353mm including grille and terminals	925mm cabinet only 964mm including tweeter and plinth 165mm cabinet only 252mm including plinth 263mm cabinet only 300mm including grille and terminals 321mm including plinth
Net weight	33.5kg (73.8lbs)	28.8kg (63.5lbs)	20.5kg (45.3lbs)
Finishes	Cabinet: Gloss black Satin White Mocha Rosenut (APAC only) Grille: Black Grey Black Black	Cabinet: Gloss Black Satin White Mocha Rosenut (APAC only) Grille: Black Grey Black Black	Cabinet: Gloss Black Satin White Mocha Rosenut (APAC only) Grille: Black Grey Black Black



705 S3

Decoupled Carbon Dome tweeter
Solid Body Tweeter-on-Top
Continuum™ cone bass / midrange
Flowport™

3-way vented-box system

1x ø25mm (1in) Decoupled Carbon Dome high-frequency
1x ø165mm (6.5in) Continuum cone bass / midrange

45Hz to 33kHz

50Hz - 28kHz

88dB

2nd and 3rd harmonics
(90dB, 1m on axis)
<1% 100Hz - 22kHz
<0.5% 150Hz - 20kHz

8Ω (minimum 3.7Ω)

30W - 120W into 8Ω on unclipped programme

0.1Ω

Height: 345mm cabinet only
413mm including tweeter

Width: 192mm cabinet only

Depth: 297mm cabinet only
410mm including plinth
337mm including grille and terminals

9.6kg (21.1lbs)

Cabinet:	Grille:
Gloss Black	Black
Satin White	Grey
Mocha	Black
Rosenut (APAC only)	Black



706 S3

Decoupled Carbon Dome tweeter
Continuum™ cone bass / midrange
Flowport™

2-way vented-box system

1x ø25mm (1in) Decoupled Carbon Dome high-frequency
1x ø165mm (6.5in) Continuum cone bass / midrange

45Hz to 33kHz

50Hz - 28kHz

88dB

2nd and 3rd harmonics
(90dB, 1m on axis)
<1% 100Hz - 22kHz
<0.5% 150Hz - 20kHz

8Ω (minimum 3.7Ω)

30W - 120W into 8Ω on unclipped programme

0.1Ω

345mm cabinet only

192mm cabinet only

297mm cabinet only
334mm including grille and terminals

8.4kg (18.6lbs)

Cabinet:	Grille:
Gloss Black	Black
Satin White	Grey
Mocha	Black
Rosenut (APAC only)	Black



707 S3

Decoupled Carbon Dome tweeter
Continuum™ cone bass / midrange
Flowport™

2-way vented-box system

1x ø25mm (1in) Decoupled Carbon Dome high-frequency
1x ø130mm (5in) Continuum cone bass / midrange

45Hz to 33kHz

50Hz - 28kHz

84dB

2nd and 3rd harmonics
(90dB, 1m on axis)
<1% 110Hz - 22kHz
<0.5% 150Hz - 20kHz

8Ω (minimum 4.0Ω)

30W - 100W into 8Ω on unclipped programme

0.1Ω

300mm cabinet only

165mm cabinet only

247mm cabinet only
284mm including grille and terminals

6.2kg (13.6lbs)

Cabinet:	Grille:
Gloss Black	Black
Satin White	Grey
Mocha	Black
Rosenut (APAC only)	Black



HTM71 S3

Decoupled Carbon Dome tweeter
Solid Body Tweeter-on-Top
Continuum™ cone FST midrange
Aerofoil™ Profile bass cones
Flowport™

3-way vented-box system

1x ø25mm (1in) Decoupled Carbon Dome high-frequency
1x ø130mm (5in) Continuum cone FST midrange
2x ø130mm (5in) Aerofoil Profile bass

45Hz to 33kHz

50Hz - 28kHz

90dB

2nd and 3rd harmonics (90dB, 1m on axis)
<1% 90Hz - 22kHz
<0.5% 120Hz - 20kHz

8Ω (minimum 3.0Ω)

30W - 200W into 8Ω on unclipped programme

0.1Ω

Height: 165mm cabinet only
233mm including tweeter
Width: 628mm cabinet only

Depth: 318mm cabinet only
356mm including grille and terminals

17.5kg (38.5lbs)

Cabinet:	Grille:
Gloss Black	Black
Satin White	Grey
Mocha	Black
Rosenut (APAC only)	Black



HTM72 S3

Decoupled Carbon Dome tweeter
Continuum™ cone bass / midrange
Flowport™

2-way vented-box system

1x ø25mm (1in) Decoupled Carbon Dome high-frequency
2x ø130mm (5in) Continuum cone bass / midrange

48Hz to 33kHz

70Hz - 28kHz

87dB

2nd and 3rd harmonics (90dB, 1m on axis)
<1% 100Hz - 22kHz
<0.5% 200Hz - 22kHz

8Ω (minimum 4.3Ω)

30W - 120W into 8Ω on unclipped programme

0.1Ω

165mm cabinet only
477mm cabinet only

266mm cabinet only
302mm including grille and terminals

9.7kg (21.3lbs)

Cabinet:	Grille:
Gloss Black	Black
Satin White	Grey
Mocha	Black
Rosenut (APAC only)	Black



702 S3 Signature

Decoupled Carbon Dome tweeter
Solid Body Tweeter-on-Top
Continuum™ cone FST midrange
Aerofoil™ Profile bass cones
Flowport™

3-way vented-box system

1x ø25mm (1in) Decoupled Carbon Dome high-frequency
1x ø150mm (6in) Continuum cone FST midrange
3x ø165mm (6.5in) Aerofoil Profile bass

-6dB 28Hz - 33kHz

46Hz - 28kHz ±3dB

2nd and 3rd harmonics (90dB, 1m on axis)
<1% 86Hz - 28kHz
<0.5% 110Hz - 20kHz

8Ω (minimum 3.1Ω)

30W - 200W into 8Ω on unclipped programme

1010mm cabinet only
1138mm including tweeter and plinth
192mm cabinet only

354mm cabinet only
391mm including grille and terminals
410mm including plinth

35.26kg (77.7lbs)

Cabinet:	Grille:
Datuk Gloss	Black
Midnight Blue Metallic	Black



705 S3 Signature

Decoupled Carbon Dome tweeter
Solid Body Tweeter-on-Top
Continuum™ cone bass / Flowport™

2-way vented-box system

1x ø25mm (1in) Decoupled Carbon Dome high-frequency
1x ø165mm (6.5in) Continuum cone bass / midrange

-6dB 45Hz to 33kHz

50Hz - 28kHz ±3dBz

88dB

2nd and 3rd harmonics
(90dB, 1m on axis)
<1% 100Hz - 22kHz
<0.5% 150Hz - 20kHz

8Ω (minimum 3.7Ω)

30W - 120W into 8Ω on unclipped programme

0.1Ω

345mm cabinet only
413mm including tweeter
192mm cabinet only

297mm cabinet only
337mm including grille and terminals

10.35kg (22.8lbs)

Cabinet: Grille:
Datuk Gloss Black
Midnight Blue Metallic Black



HTM71 S3 Signature

Decoupled Carbon Dome tweeter
Solid Body Tweeter-on-Top
Continuum™ cone FST midrange
Aerofoil™ Profile bass cones
Flowport™

3-way vented-box system

1x ø25mm (1in) Decoupled Carbon Dome high-frequency
1x ø130mm (5in) Continuum cone FST midrange
2x ø130mm (5in) Aerofoil Profile bass

-6dB 45Hz to 33kHz

50Hz - 28kHz ±3dBz

89dB

2nd and 3rd harmonics
(90dB, 1m on axis)
<1% 90Hz - 22kHz
<0.5% 120Hz - 20kHz

8Ω (minimum 3.0Ω)


30W - 200W into 8Ω on unclipped programme

165mm cabinet only
233mm including tweeter
628mm cabinet only

318mm cabinet only
356mm including grille and terminals

18.5kg (40.8lbs)

Cabinet: Grille:
Datuk Gloss Black
Midnight Blue Metallic Black

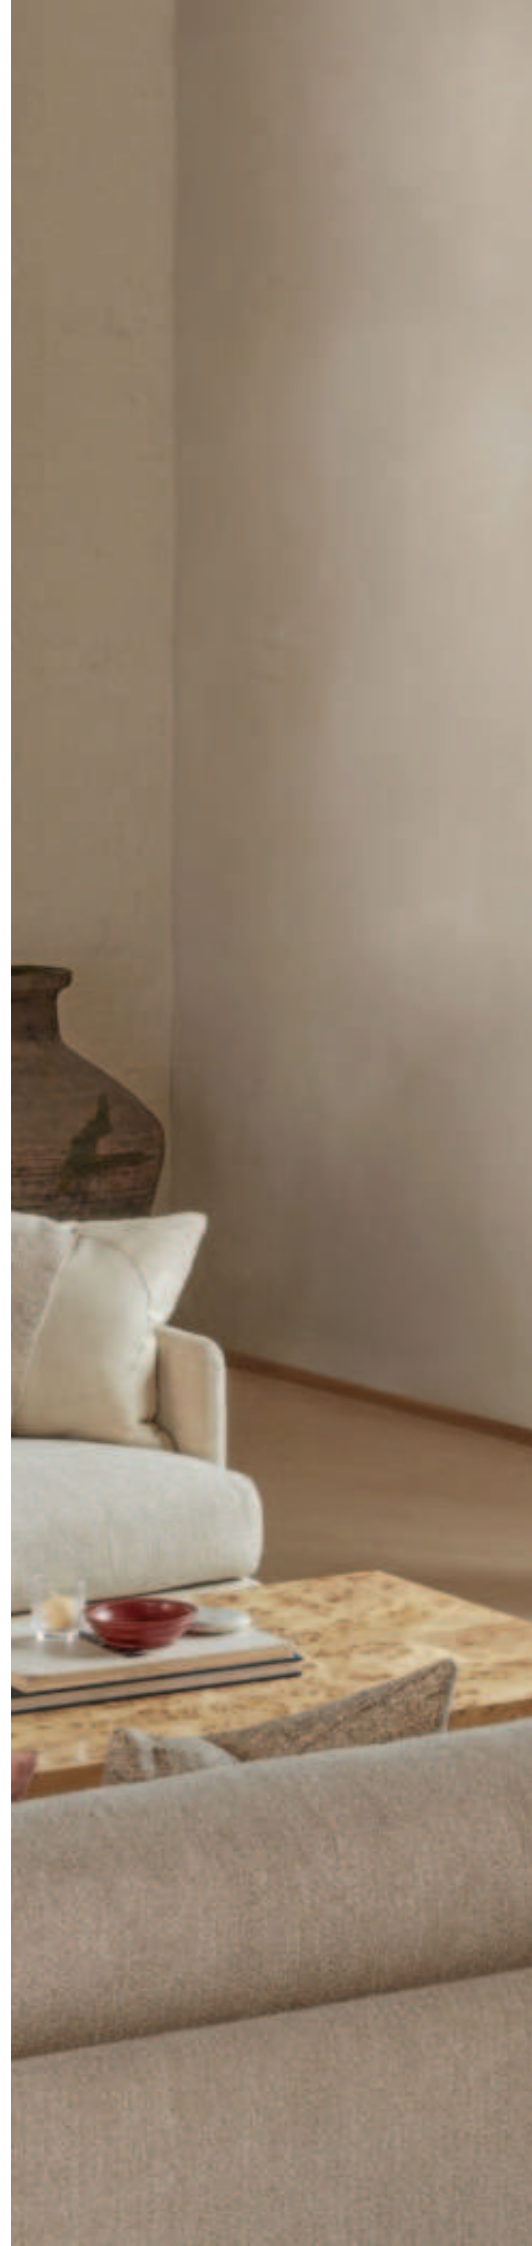



Bowers & Wilkins

www.bowerswilkins.com

Distributed by Homemation (Pty) Ltd

011 781 8887

info@homemation.co.za

JOHANNESBURG

14 Commerce Crescent
Kramerville Sandton,
2090

CAPE TOWN

Unit 10B,
The Waverley Business Park
Kotzee Road, Mowbray

