

Climate Series 3G


Pinpoint sound in almost any direction.

Climate Series 3G offers exceptional sound coverage in any direction.


The 'Quik-Link' inspired bracket system on Climate Series 3G allows the speaker to rotate on its axis in almost any direction. This allows the sound to be easily directed into the desired location.

- The ratchet teeth on the bracket allow for 11.25-degree steps.
- There are 8 steps from 0 – 90 degrees to allow for numerous directional positions.

Once the user has positioned the speaker at the most appropriate angle for the installation, the speaker can then be securely tightened to the bracket with the single screw supplied.

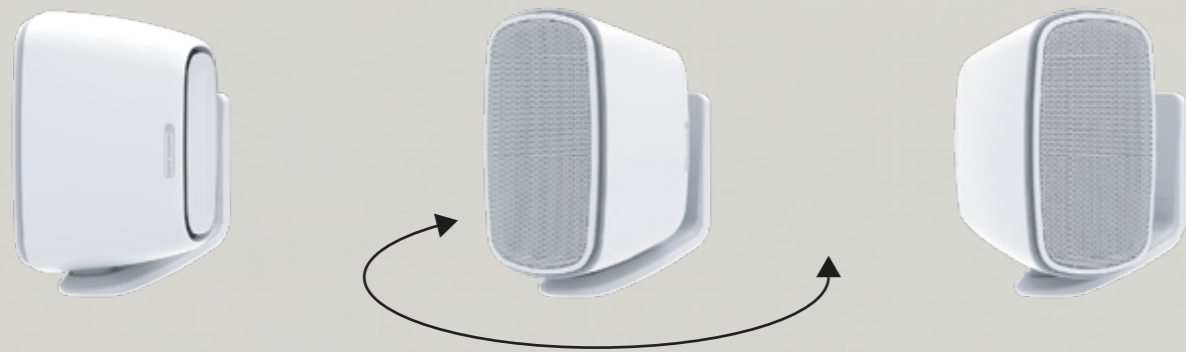

In vertical plain, Climate Series 3G can rotate through: 90 degrees in a left or right direction.

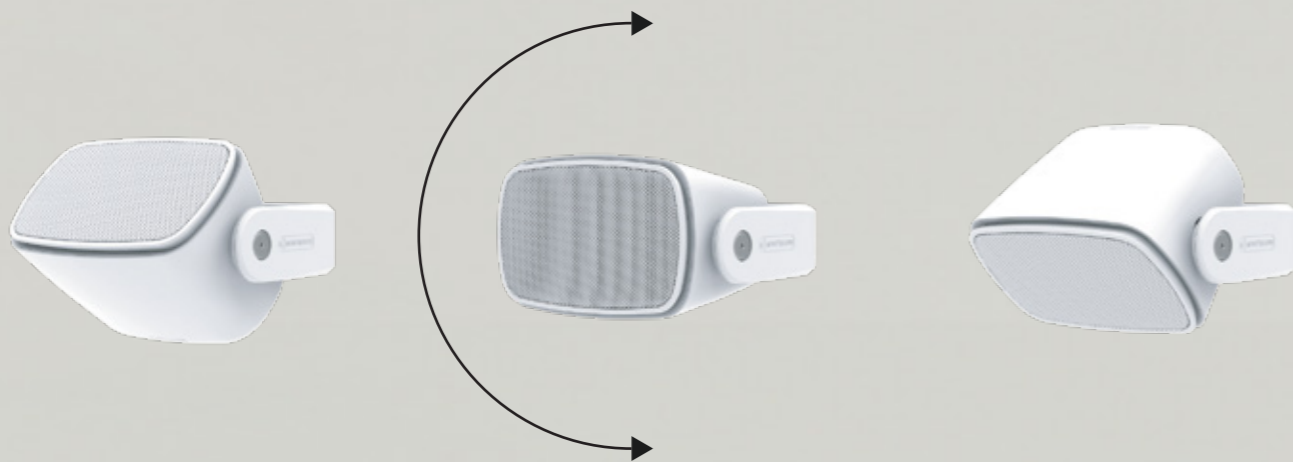

In horizontal plain, Climate Series 3G can rotate through: 90 degrees in an upwards or downwards direction.

Climate Medium – CL2 M

Mid-sized two-way, highly versatile wall-mountable speaker

Climate Medium offers signature Monitor Audio high-fidelity sound outside or in. Voiced and engineered by the Monitor Audio acoustic team in the same manner as any premium loudspeaker, Climate Medium delivers sonic detail and dynamic bass performance with ease. With advanced driver technology and powerful motor systems, along with an Auxiliary Bass Radiator (ABR) to extend the bass output – which is also ideal for external placement - and featuring the innovative 'Quik-Link' which is also ideal for external placement - and featuring the innovative 'Quik-Link' bracket system, Climate Medium's contemporary design blends in as seamlessly with interiors as it does with exteriors.

Features at a glance:

- Two-way design
- Auxiliary Bass Radiator
- 1 x 165mm (6") RST II bass-mid driver
- 1 x 25mm (1") C-CAM Black dome tweeter
- Fully sealed, moulded and loaded ABS cabinet construction
- IP Rated to IP66
- Die-cast 'Quik-link' bracket system with integrated speaker wiring
- Tilt-wedge brack 3Dprint design file (supplied)
- Finishes available: Matt Black and Matt White
- Packaged and sold in pairs
- 5-year Warranty



Climate Small – CL2 S

Compact two-way, highly versatile wall-mountable speaker

Despite its diminutive size, Climate Small packs a powerful sonic punch. Voiced and engineered by the Monitor Audio acoustic team in the same manner as any premium loudspeaker, Climate Small delivers high-fidelity performance with consummate ease. With advanced driver technology and powerful motor systems, along with an Auxiliary Bass Radiator (ABR) to extend the bass output – which is also ideal for external placement - and featuring the innovative 'Quik-Link' bracket system, Climate Small's contemporary design blends in as seamlessly with interiors as it does with exteriors.

Features at a glance:

- Two-way design
- Auxiliary Bass Radiator
- 1 x 100mm (4") RST II bass-mid driver
- 1 x 25mm (1") C-CAM Black dome tweeter
- Fully sealed, moulded and loaded ABS cabinet construction
- IP Rated to IP66
- Die-cast 'Quik-link' bracket system with integrated speaker wiring
- Tilt-wedge brack 3Dprint design file (supplied)
- Finishes available: Matt Black and Matt White
- Packaged and sold in pairs
- 5-year Warranty



Technical specifications



Model	CL2 M	CL2 S
IP Rating	IP66	IP66
System Format	2-Way	2-Way
Sensitivity (2.83v @ 1m, Installed)	85.5 dB	84 dB
Recommended Amplifier Power (RMS, Music Signal)	200 W	150 W
Continuous Power Handling (CTA 426-B)	100 W	70 W
Nominal Impedance	6 Ohms	6 Ohms
Minimum Impedance (20Hz to 20kHz)	4.8 Ohms	4.9 Ohms
Drive Unit Complement	1 x 6" (152 mm) C-CAM RST II mid-bass driver 1x 25mm (1") C-CAM tweeter	1 x 4" (102 mm) C-CAM RST II mid-bass driver 1x 25mm (1") C-CAM tweeter
Frequency Response, On-Wall (-6dB)	42Hz - 30kHz	56Hz - 30kHz
Maximum Peak SPL (AES75, Z-weighted)	110 dB	108 dB
Bass Alignment	Auxiliary Bass Radiator	Auxiliary Bass Radiator
Crossover Frequency	2.6kHz	3.3kHz
External Dimensions with all accessories fitted (H x W x D)	332 x 190 x 240mm (13 ^{1/16} x 7 ^{1/2} x 9 ^{7/16} "	247 x 140 x 217mm (9 ^{3/4} x 5 ^{1/2} x 8 ^{7/16} "
Weight (each)	4.1 kg (9 lb 1 oz)	2.7 kg (5 lb 15 oz)

Available Finishes



White



Black