

Quicke

THE NEW SILOCUT RANGE

PACKED WITH GROUND-BREAKING FEATURES



Silocut M+

WELL PROVEN SHEAR GRAB SUITED FOR FRONT LOADERS, COMPACT WHEEL LOADERS AND MID-SIZE TELEHANDLERS.

- Cuts cleanly in the silage clamp.
- Perfect size and capacity for front loaders, telehandlers and lighter wheel loaders.
- Features 80x80 Bolt on hooks and accessories.


SILOCUT M+ (F AND P VERSION)	125**	150	175	200	225
Working width, cm	125	150	175	200	225
Opening height total, cm	133	133	133	133	133
Opening, cm	77	77	77	77	77
Height total, cm	98	98	98	98	98
Depth inside until implement back, cm	68	68	68	68	68
No. of cylinders	2	2	2	1-2	3
Cylinder sizes	90/40	100/50	110/50	90/40-100/50	100/50
Volume, m ³	0,8	0,95	1,1	1,25	1,4
No. of tines	10	12	14	16	18
Weight*, kg (forged)	461	507	543	720	759
Weight*, kg (profiled)	476	528	609	751	790

Available accessories:
 Back screen
 Hose kits
 Pressure relief valve
 Load-hold/Pressure relief valve

* without Bolt on Hooks
 ** Only available as forged tine version.



Replaceable bolt on parking stand. The design is discrete and incorporates chamfers to cut easy through silage

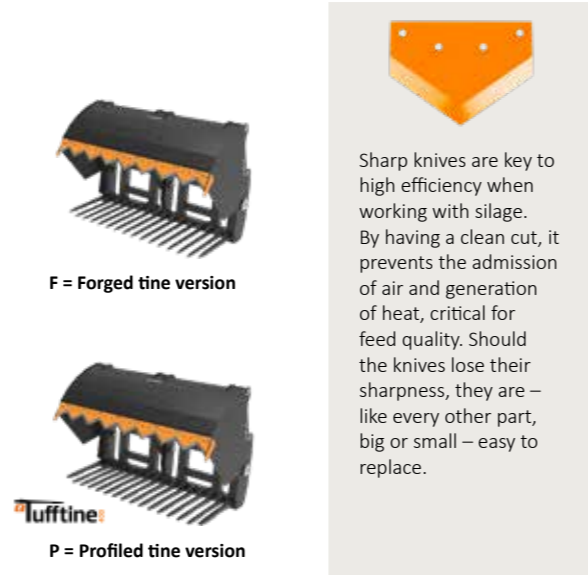

Sharp knives are key to high efficiency when working with silage. By having a clean cut, it prevents the admission of air and generation of heat, critical for feed quality. Should the knives lose their sharpness, they are – like every other part, big or small – easy to replace.



Silocut XL+


HIGH-CAPACITY SHEAR GRAB FOR CUTTING SILAGE FROM SILAGE CLAMP AND SPLITTING BALES.

- High-capacity shear grab with tines or bucket.
- Cuts both silage and bales.
- Available with 80x80 XL BoH system and optional Bale Wrap Handler and Push out.**

SILOCUT XL+	225	250
Working width, cm	225	250
Opening height total, cm	187-192	187-192
Opening, cm	125-128	125-128
Height total, cm	139	139
Depth inside until implement back, cm	84-94	84-94
No. of cylinders	2	2
Cylinder sizes	125/60	125/60
Volume, m ³	2,4	2,7
No. of tines	18	20
Cutting edge WxD, mm (bucket)	200 x 20	200 x 20
Weight*, kg (forged)	1381	1498
Weight*, kg (profiled)	1469	1615
Weight*, kg (bucket)	1498	1632

Available accessories:
 Hydraulic push-out (for forged- and profiled tine version)
 Bale Wrap Handler
 Pressure relief valve
 Load-hold/Pressure relief valve

* without Bolt on Hooks
 ** Bale Wrap Handler and hydraulic push-out cannot be combined for the Silocut XL+

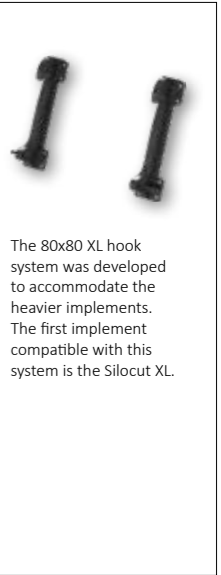

The 80x80 XL hook system was developed to accommodate the heavier implements. The first implement compatible with this system is the Silocut XL.



Example pictures showing the three different variants:

Available accessories:



Silocut L+

VERSATILE SHEAR GRAB FOR CUTTING SILAGE FROM SILAGE CLAMP AND SPLITTING BALES


- Versatile shear grab with tines or bucket.
- Cuts both silage and bales.
- Bale Wrap Handler and Push Out available as accessories.**

SILOCUT L+	175	200	225	250
Working width, cm	175	200	225	250
Opening height total, cm	178-184	178-184	178-184	178-184
Opening, cm	126	126	126	126
Height total, cm	125	125	125	125
Depth inside until implement back, cm	83	83	83	83
No. of cylinders	2	2	2	2
Cylinder sizes	125/60	125/60	125/60	125/60
Volume, m ³	1,4	1,6	1,8	2,0
No. of tines	14	16	18	20
Cutting edge WxD, mm (bucket)	150x18	150x18	150x18	150x18
Weight*, kg (forged)	928	967	1032	1105
Weight*, kg (profiled)	916	955	1020	1093
Weight*, kg (bucket)	908	1028	1148	1268

Available accessories:
 Bale Wrap Handler
 Back screen (for forged- and profiled tine version)
 Hydraulic push-out (for forged- and profiled tine version)
 Pressure relief valve
 Load-hold/Pressure relief valve
 * without Bolt on Hooks
 ** Bale Wrap Handler and hydraulic push-out can be combined for the Silocut L+

Example pictures showing the three different variants:

Available accessories:

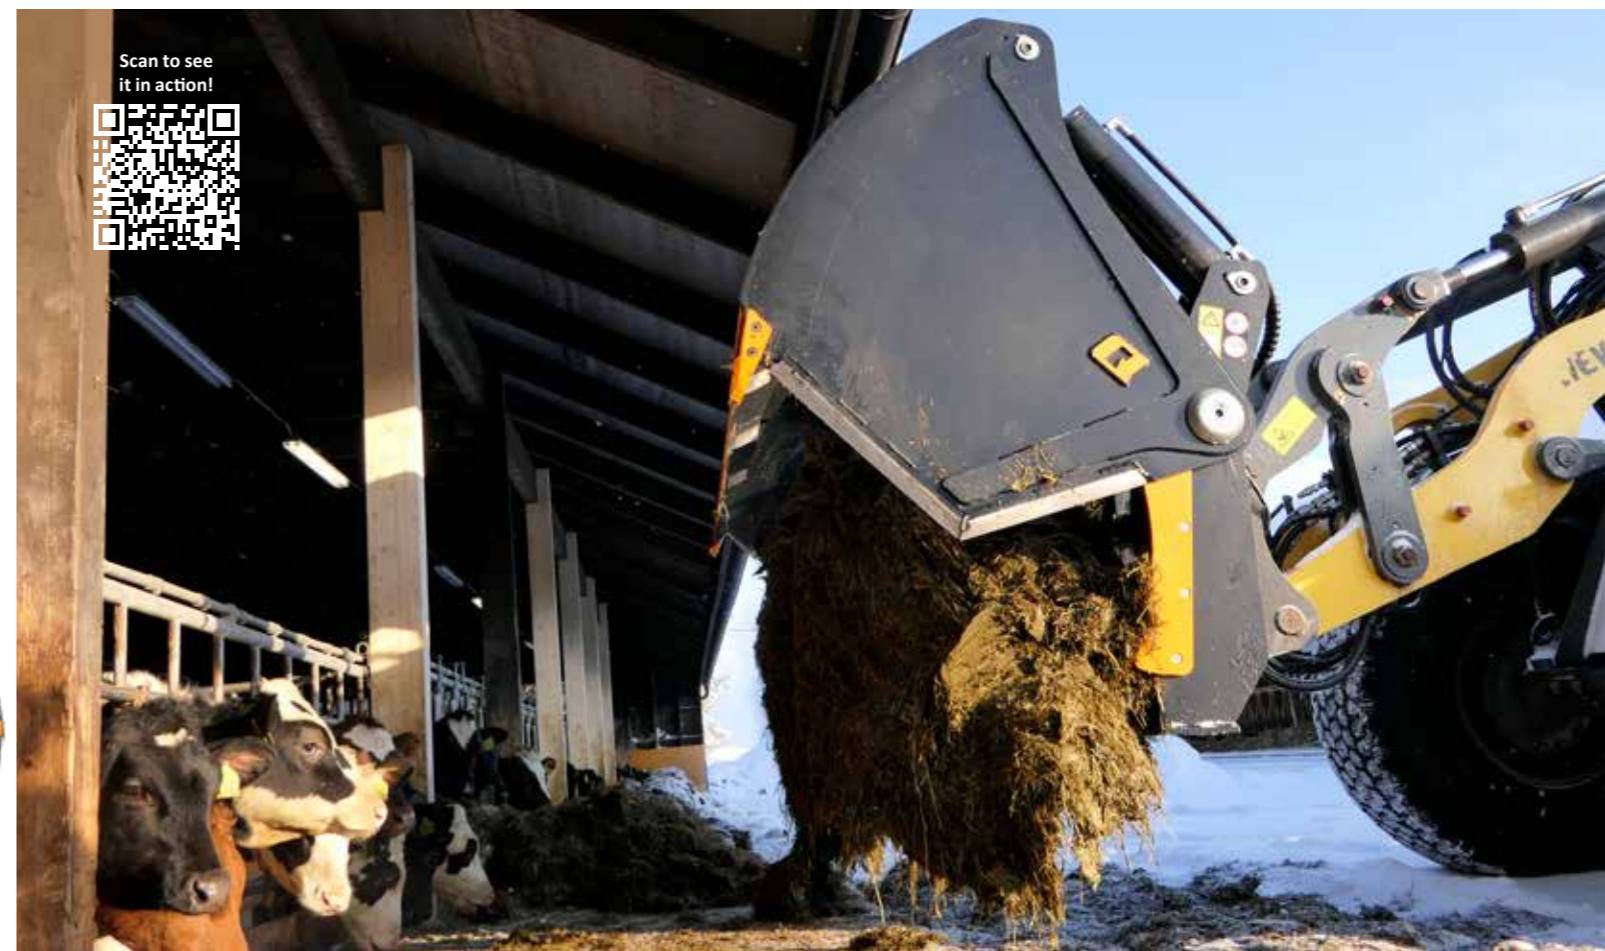



Scan to see our
Silocut Range!



Quicke

Member of JOST Agriculture

Ålö AB

Brännland 300, SE-901 37 Umeå, Sweden

Tel: +46 (0)90 17 05 00

marketing@alo.se

www.quicke.nu

Some front loaders in this brochure are fitted with extra equipment. Certain products may be optional extra equipment. Some of the products are not available on all markets. Product specifications and performance data stated can vary depending on the tractor model. Working with front loaders and accompanying implements is not without risk. Serious injuries to people and damage to materials can occur in the event of incorrectly carried out work. Show consideration to your surroundings, use common sense and comply with local laws and regulations. Always read carefully through the instruction manual supplied. Only use original spare parts and accessories. Ålö's product range is continually being developed. We reserve the right at any time to alter specifications, prices and versions with no obligation on our part. ®, ™ Trademarks of Ålö AB.