


### Threaded Fittings – Self Seal

Available for all Tavlit threaded fittings range.

Features:

- Maximum working pressure 16 bars (230 psi).
- Save labour and Teflon tape.
- Tighten by hand only.
- Full proof using our male to female assembly.
- Add "s" to threaded fittings cat. No. for Self-Seal.
- EPDM o-ring – fertilizer resistant.

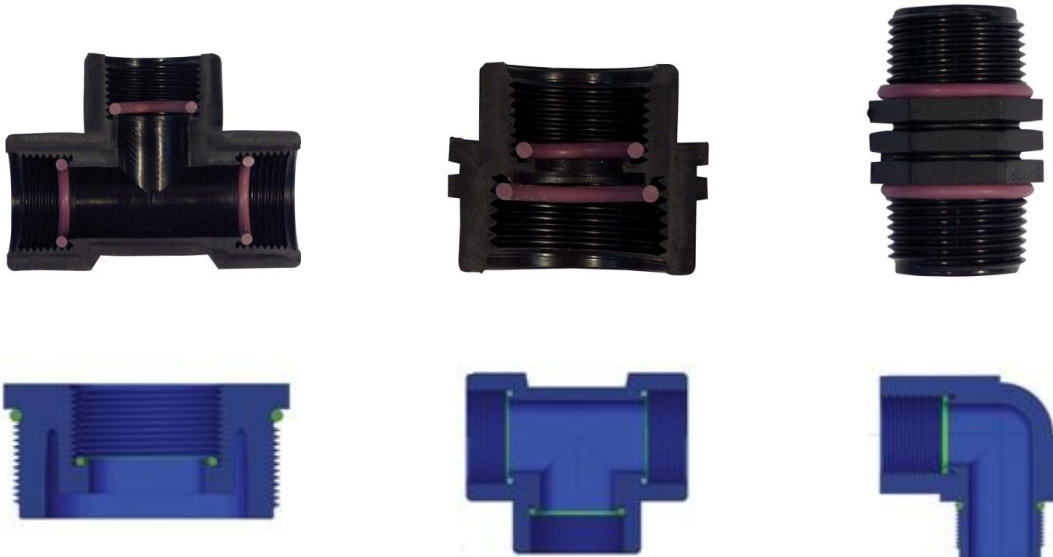

### Self-Seal Assembly



**Seal on male thread O-ring**

**Seal on female thread O-ring**