

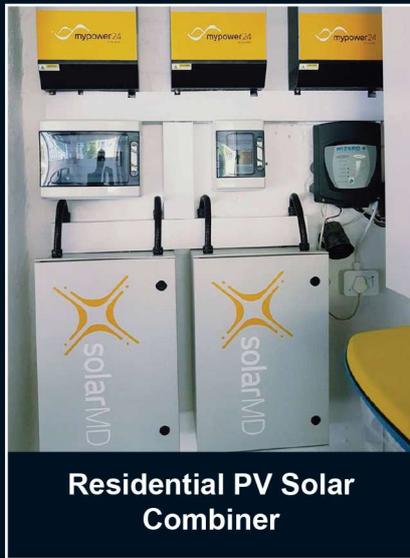


# Application images

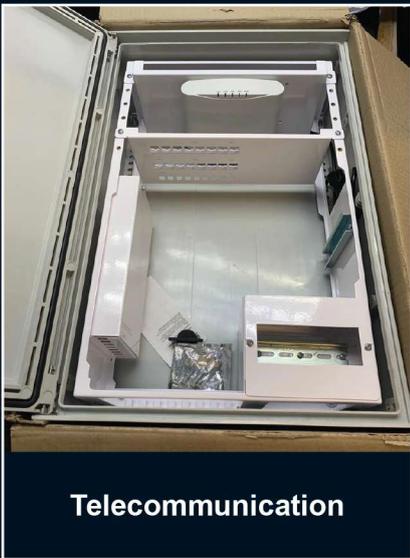

### 3 - 6D Features

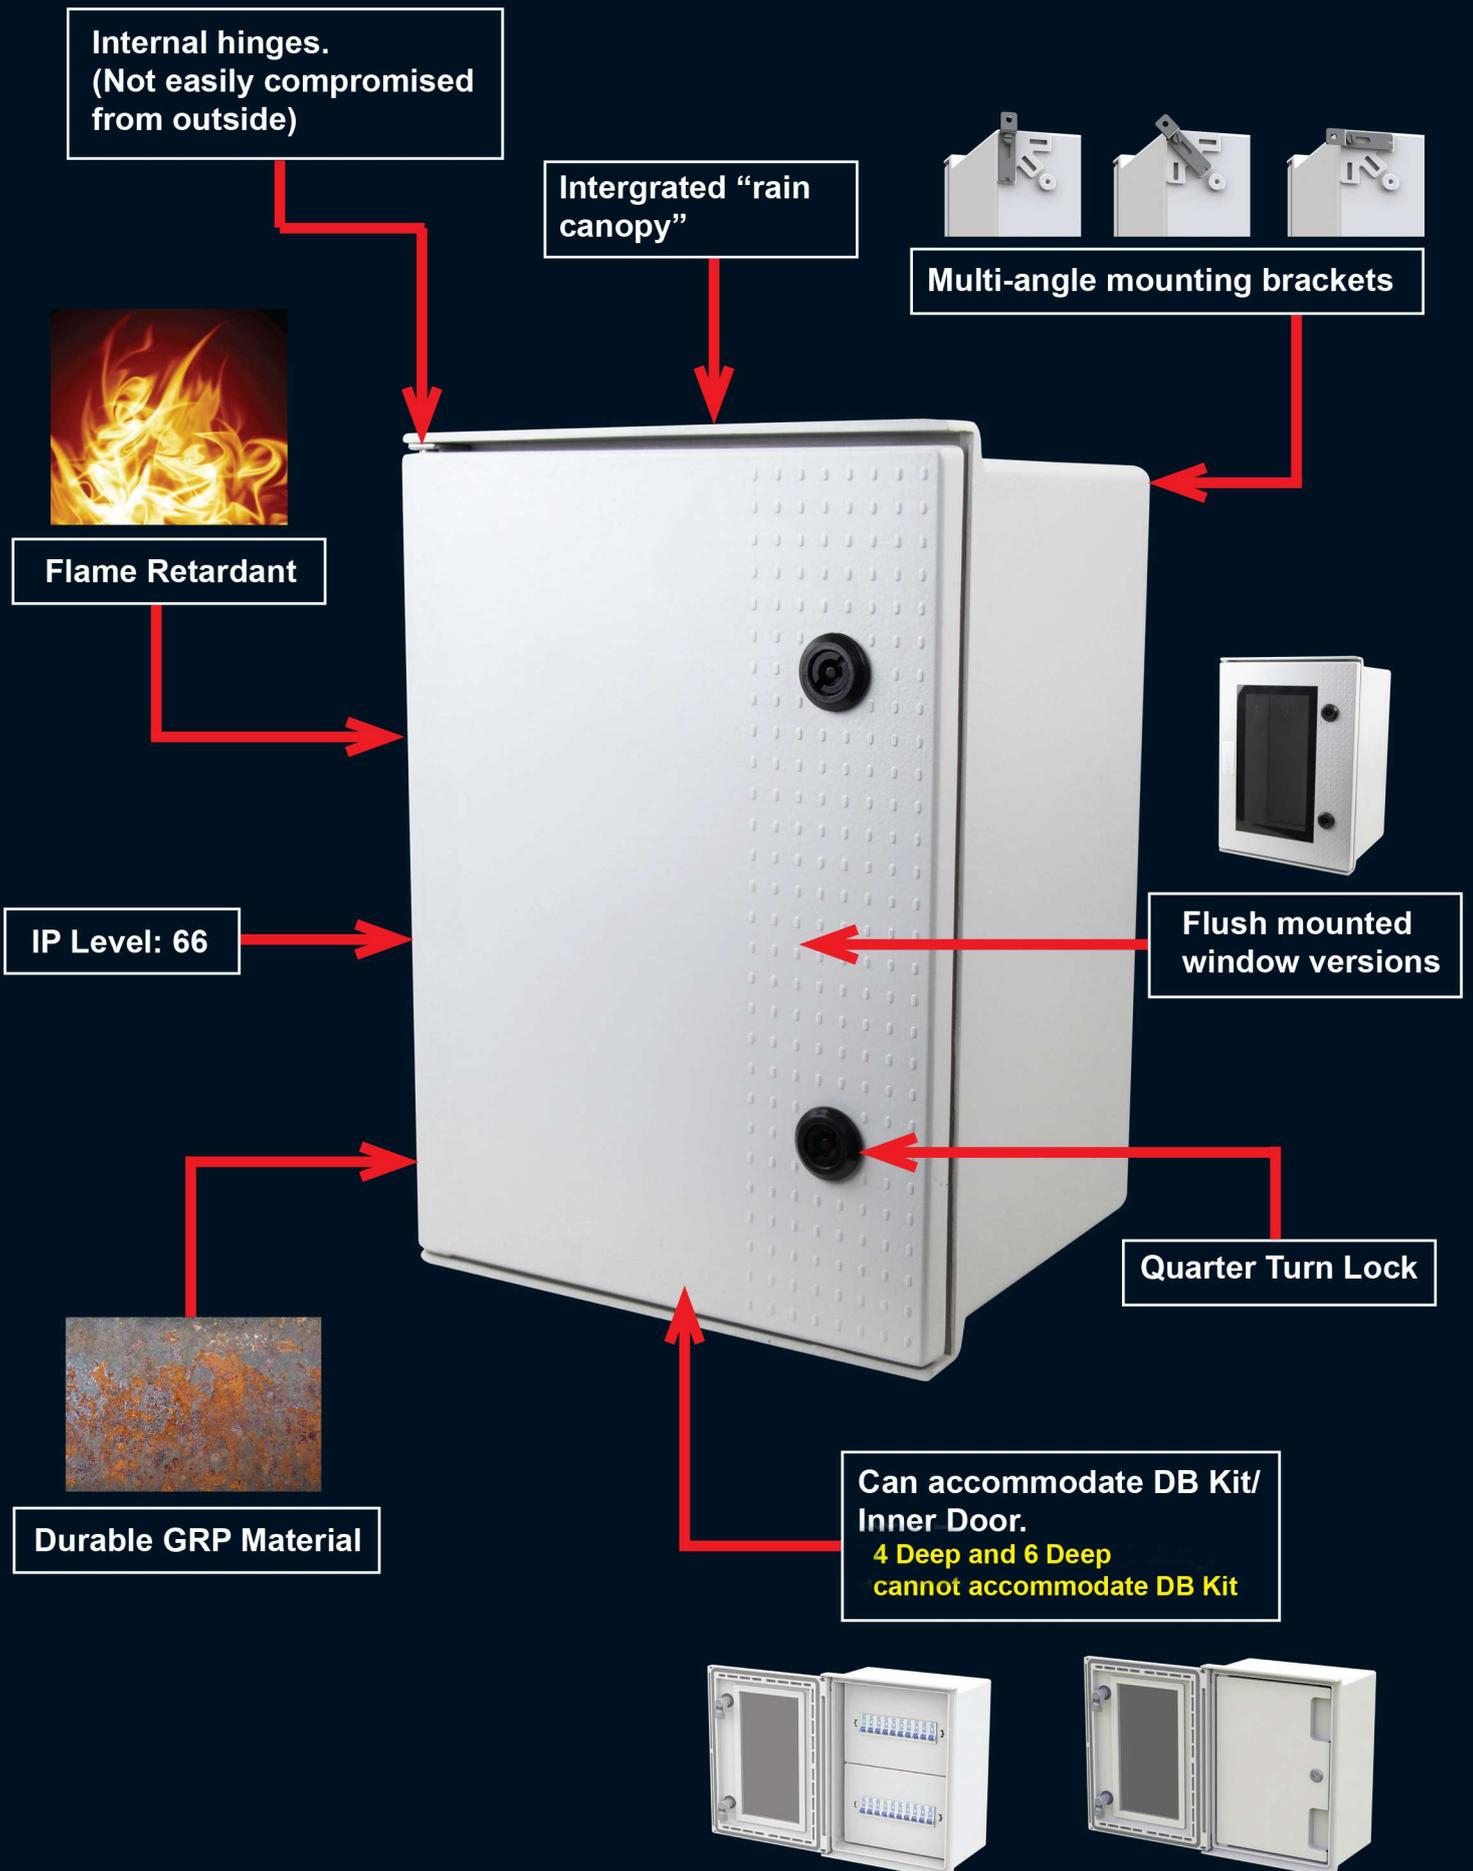

Material	SMC (Sheet Moulding Compound)			
Operating Temperature	-50° C to + 200° C			
Glow Wire Capability / Flammability	960° / UL94 V0			
Expected UV Life (Direct Exposure)	25 years +			
IP Level	IP66			
IK Level	IK10			
Security Level	1	2	3	4




## 6.5 & 7.1

\* Please note that the construction of the 6.5 and 7.1 sizes differs from the smaller sizes (3-6D). The features therefore differ.

### 6.5



### 7.1

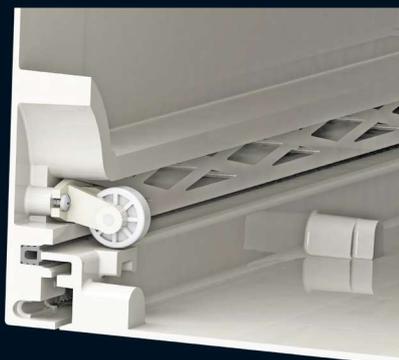

Door locator



Extra strength lid



Easily Removable door