Full Specification sheet
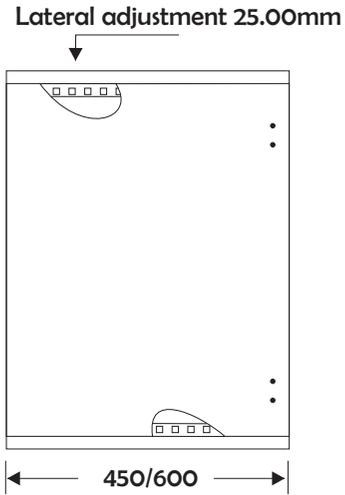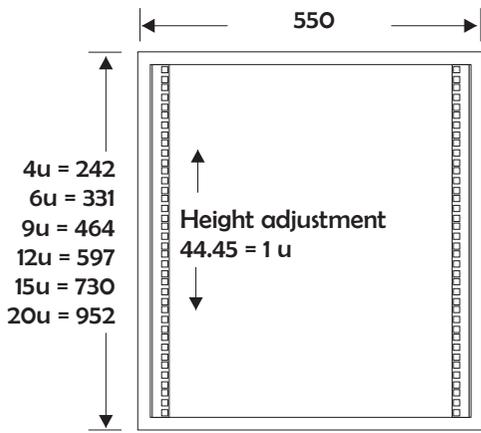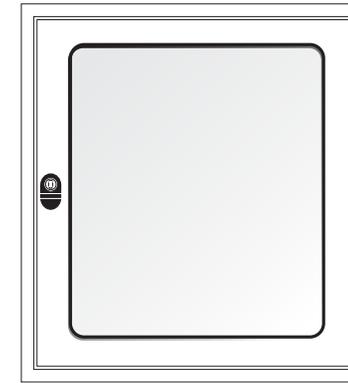
eurobyte

550

4u = 242
6u = 331
9u = 464
12u = 597
15u = 730
20u = 952

Height adjustment
44.45 = 1 u

Lateral adjustment 25.00mm

450/600

Quick Fit Wall Bracket

Cable Opening

← Back Panel →
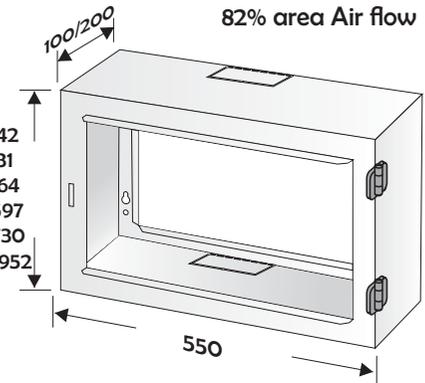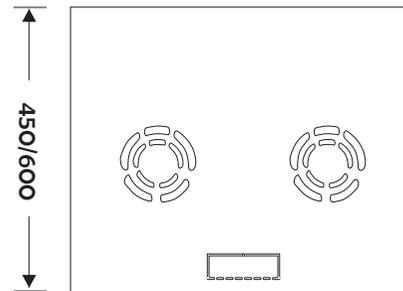can be removed
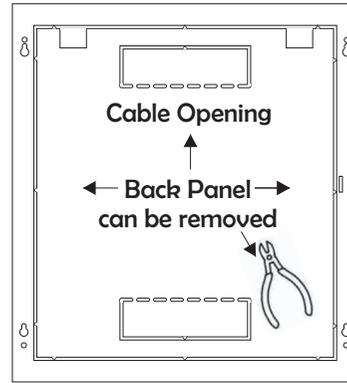
(Set 4) m6 Rawl bolts included

Glass Door Version
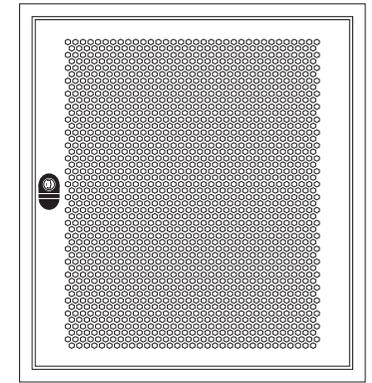
Perf Door Version
82% area Air flow

450/600

100/200

4u = 242
6u = 331
9u = 464
12u = 597
15u = 730
20u = 952

550

EURO CERT

SOUTHERN AFRICAN DEVELOPMENT COMMUNITY — TOWARDS A COMMON FUTURE — SADC

Wall Box Glass Door				Wall Box Perf Door				Retro-Fit collar			
kg	450 deep	u	600 deep	kg	kg	450 deep	u	600 deep	kg	kg	100 deep	u	200 deep	kg
	AP44U.GLA.B.PC	4	AP64U.GLA.B.PC			AP44U.PERF.B.PC	4	AP64U.PERF.B.PC			TW4UCOLLAR100	4	TW4UCOLLAR200	
	AP46U.GLA.B.PC	6	AP66U.GLA.B.PC			AP46U.PERF.B.PC	6	AP66U.PERF.B.PC			TW6UCOLLAR100	6	TW6UCOLLAR200	
	AP49U.GLA.B.PC	9	AP69U.GLA.B.PC			AP49U.PERF.B.PC	9	AP69U.PERF.B.PC			TW9UCOLLAR100	9	TW9UCOLLAR200	
	AP412U.GLA.B.PC	12	AP612U.GLA.B.PC			AP412U.PERF.B.PC	12	AP612U.PERF.B.PC			TW12UCOLLAR100	12	TW12UCOLLAR200	
	AP415U.GLA.B.PC	15	AP615U.GLA.B.PC			AP415U.PERF.B.PC	15	AP615U.PERF.B.PC			TW15UCOLLAR100	15	TW15UCOLLAR200	
	AP420U.GLA.B.PC	20	AP620U.GLA.B.PC			AP420U.PERF.B.PC	20	AP620U.PERF.B.PC			TW20UCOLLAR100	20	TW20UCOLLAR200	