

(Single Rail, VGA Series 17" LCD KVM Switch 8 Ports)






## Features:

I.Module design: LCD Console Front Part(keyboard, mouse, monitor 17" ) + 8ports KVM Module

- design; It's very flexible and convenient for combination, easy for stock;
- II. Keyboard is with demountable design, with 9 different languages: American, English, German, French, Spanish, Swiss, Turkish, Russian, Italian;
- III. IP optional ( IP card could be installed inside KVM module);
- IV. The front USB design;
- V. Cascade function support;
- VI. Total length: 611mm, fit for 800-1200mm cabinet;
- VII. Cable: 1.8/3/5m are available;
- VIII. Monitor resolution: 1280\*1024@60Hz(optimal); KVM resolution: 1920\*1200@60Hz

## Module Diagram:

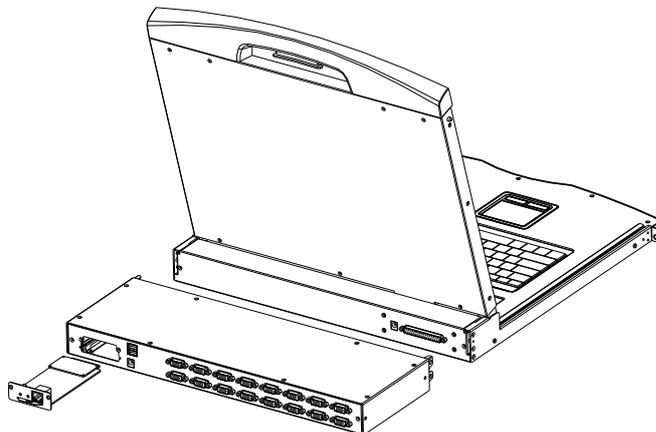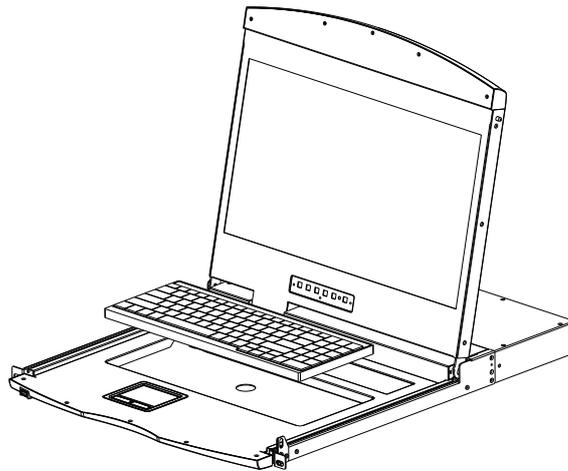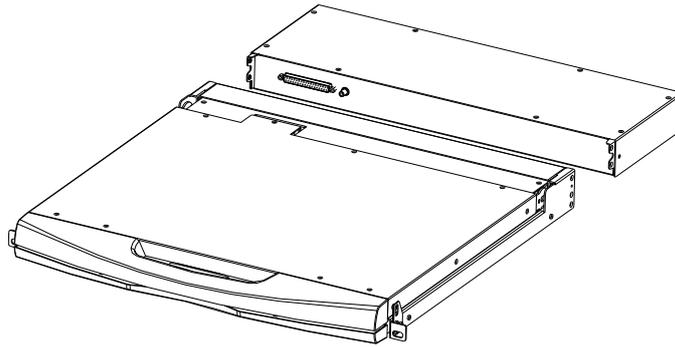

## 17" LCD Console Specification:

Type		17" LCD Console- CX-1708
LCD Monitor	Ratio	17" Screen, 4:3
	Video	SXGATFT-LCD
	Visible Square	337.920(H) × 270.336(V)
	Resolution	1280*1024@60HZ(Optimal)/1920*1200@60HZ(Max)
	Support Color	16.7M (RGB 6 bit + Hi_FRC)
	Contrast	1000 : 1 (Typ)
	Backlight	LED
	Pixel Pitch	0.264x0.297mm
	LEDMTBF	100,000 hours
	Input power	12V
Keyboard (demountable design)	Keyboard	100Keys, detachable (9 different languages for choose)
	Compatible IBM/AT	Microsoft Windows9, Me/NT/2000/XP, WIN7, Server2003, WIN8, WIN10
	Port	Standard PS/2; USB
	Using life	>1,000,000 Times
Mouse	Type	Touch Screen
	Port	Standard PS/2
	X/Y Resolution	>1000dots/inch, (40x40/mm)
	Using life	>1,000,000 Times
Installation Dimension	407*445*45mm	
Weight	6.15kg	

## KVM Module Specification:

Type		8 Port(ULSV08)	
Model No.(Completed Device)		AS7100ULS(F)+ULSV08 (CX-1708)	
Computer Connection	Direct Connects	8	
	Maximum Connects	128	
CPU Port Selection		OSD Menu, Front panel buttons, Hot Key, IP Remote Control (Optional)	
Connectors	Console Connector		DB 37PIN
	PC Connector	Monitor, Keyboard/Mouse Switch Module	8 x VGA DB15, Female Blue
	Power		1 x DC Jack
	Network Port		1 x RJ45(Optional)
Key Switch	Connection Port Selection		KVM Operation Panel Digital keys
	KVM Reset		KVM Operation Panel Function Keys
	IP Module Reset		1 x semi-embedded key
	IP Module Default		1 x semi-embedded key
LED's	Selected		Nixie Tube Display

	Online	8 x Red
	IP Network	1 x Green, 1 x Orange
Analog Mode	Keyboard/Mouse	USB, PS/2
Resolution (Max)		1920 x 1200 @ 60HZ Local & Remote
Scan time interval		3, 5, 10, 15, 20, 30, 40, 60s (3s by default)
Operating Environment	Operating temperature	-10-50°C
	Storage temperature	-20-60°C
	Humidity	0-80%RH, No Condensation
Physical Properties	Housing	Metal
	Dimension	148.4*445*45mm
	Weight	3.32kg