

(Single Rail, VGA Series 17" LCD KVM Switch 16 Ports)






Features:

- I. Module design structure: Front LCD Console Part (keyboard, mouse, monitor 17") + 16ports KVM Module ; It's very flexible and convenient for combination;
- II. Keyboard is module design, with 9 different languages: American, English, German, French, Spanish, Swiss, Turkish, Russian, Italian;
- III. IP optional (IP card could be installed inside KVM module to realize remote control function);
- IV. Monitor resolution:1280*1024@60Hz (Optimal); KVM resolution:1920*1200@60Hz;
- V. The front USB design;
- VI. Cascade function support;

VII. Total length: 611mm, fit for 800-1200mm cabinet;

VIII. Cable: 1.8/3/5m are available

Module Diagram:

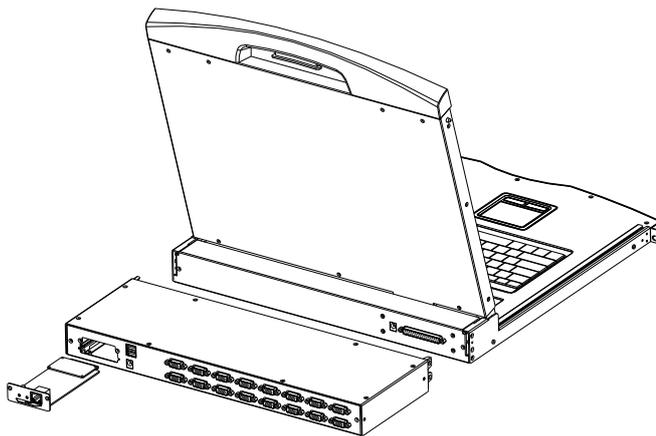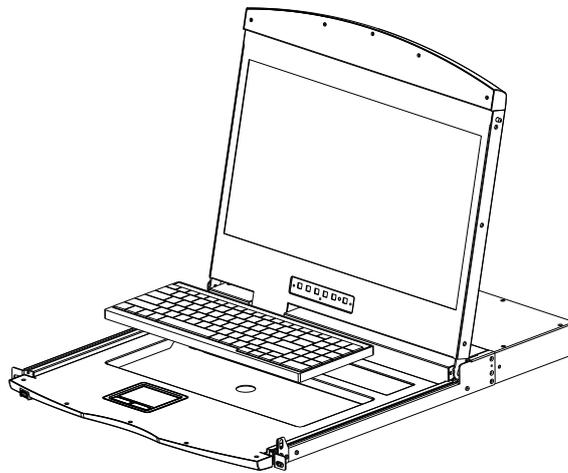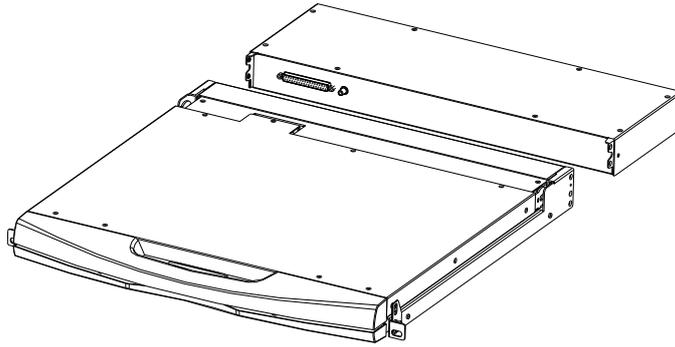

17" LCD Console Specification

Type	17" LCD Console- CX-1716	
LCD Monitor	Ratio	17" Screen, 4:3
	Video	SXGATFT-LCD
	Visible Square	337.920(H) × 270.336(V)
	Resolution	1280*1024@60HZ(Optimum)/1920*1200@60HZ(Max)
	Support Color	16.7M (RGB 6 bit + Hi_FRC)
	Contrast	1000 : 1 (Typ)
	Backlight	LED
	Pixel Pitch	0.264x0.297mm
	LEDMTBF	100,000 hours
	Input power	12V
Keyboard (demountable design)	Keyboard	100Keys, detachable (9 different languages for choose)
	Compatible IBM/AT	Microsoft Windows9, Me/NT/2000/XP, WIN7, Server2003, WIN8, WIN10
	Port	Standard PS/2; USB
	Using life	>1,000,000 Times
Mouse	Type	Touch Screen
	Port	Standard PS/2
	X/Y Resolution	>1000dots/inch, (40x40/mm)
	Using life	>1,000,000 Times
Installation Dimension	407*445*45mm	
Weight	6.15kg	

KVM Module Specification

Type		16 Port(ULSV16)	
Model No.(Completed Device)		AS7100ULS(F)+ULSV16 (CX-1716)	
Computer Connection	Direct Connects	16	
	Maximum Connects	256	
CPU Port Selection		OSD Menu, Front panel buttons, Hot Key, IP Remote Control (Optional)	
Connectors	Console Connector		DB 37PIN
	PC Connector	Monitor, Keyboard/Mouse Switch Module	16 x VGA DB15, Female Blue
	Power		1 x DC Jack
	Network Port		1 x RJ45(Optional)
Key Switch	Connection Port Selection		KVM Operation Panel Digital keys
	KVM Reset		KVM Operation Panel Function Keys
	IP Module Reset		1 x semi-embedded key
	IP Module Default		1 x semi-embedded key
LED's	Selected		Nixie Tube Display
	Online		16 x Red
	IP Network		1 x Green, 1 x Orange
Analog Mode	Keyboard/Mouse		USB, PS/2
Resolution (Max)		1920 x 1200 @ 60HZ Local & Remote	
Scan time interval		3, 5, 10, 15, 20, 30, 40, 60s (3s by default)	
Operating Environment	Operating temperature		-10-50°C
	Storage temperature		-20-60°C
	Humidity		0-80%RH, No Condensation
Physical Properties	Housing		Metal
	Dimension		148.4*445*45mm
	Weight		4.96kg