


megaflo 450 litre

electric water heaters

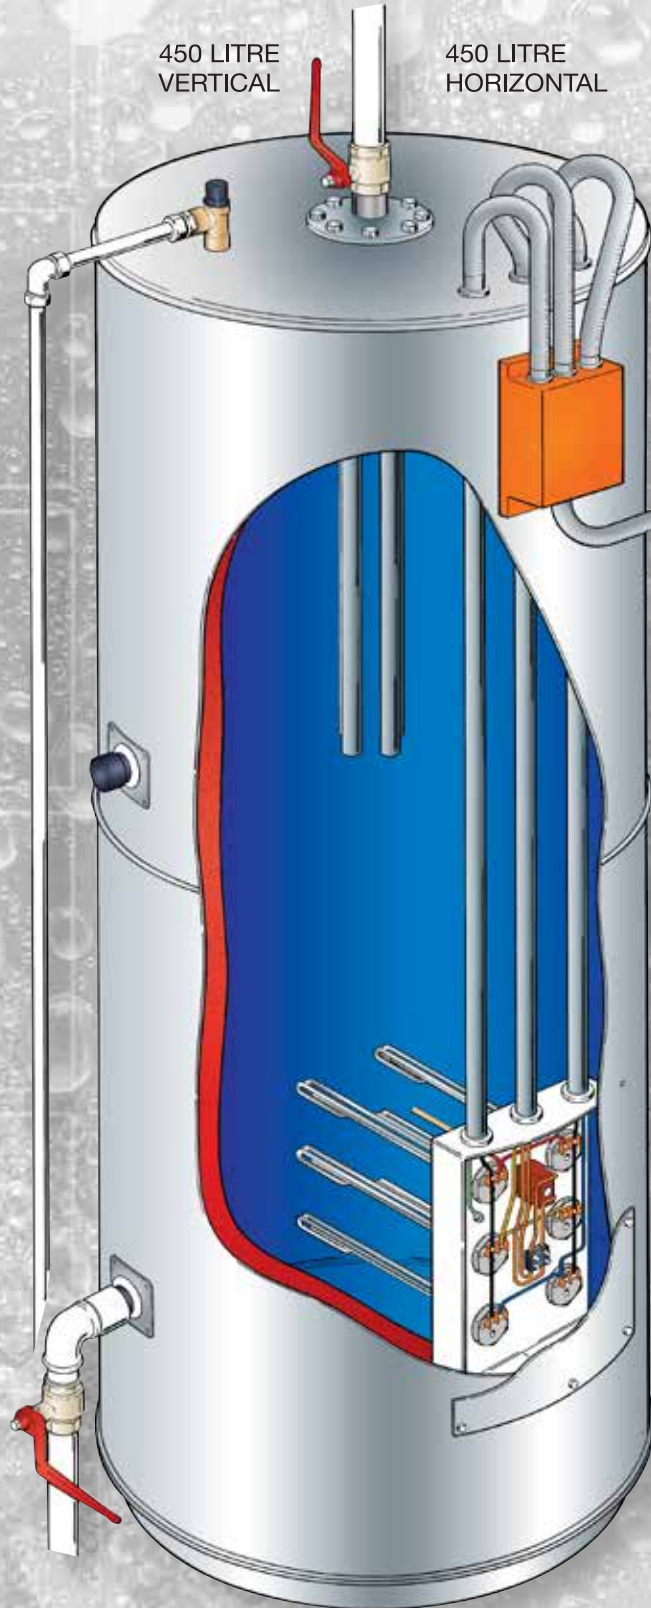

450 LITRE
VERTICAL

450 LITRE
HORIZONTAL

FOR AN



AMPLE

SUPPLY OF HOT WATER


LIGHT COMMERCIAL ELECTRIC WATER HEATERS

product features

- Megaflo 450 litre electric water heaters have been designed for light commercial and large domestic hot water applications.
- When used with good mains pressure, the water heater can be installed almost anywhere - floor standing or roof.
- Megaflo 450 litre water heaters have a polyurethane foam insulation and are finished with a galvanised outer casement.
- The element load cannot be switched directly through the thermostat and a contactor switch rated 30Amp AC1 duty must be utilised. The contactor switch is not a standard component and must be specified and purchased separately.
- Megaflo 450 litre can be installed in all areas. For aggressive water conditions, "incolloy" electric heating elements can be requested at an additional cost.
- Megaflo 450 litre water heaters operate up to **400kPa** and will work efficiently under lower pressures.

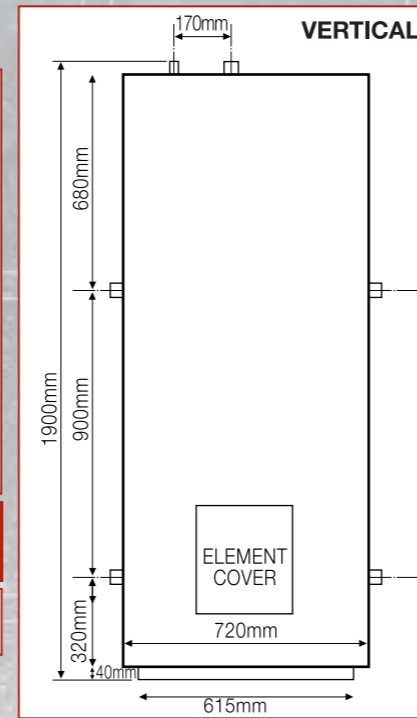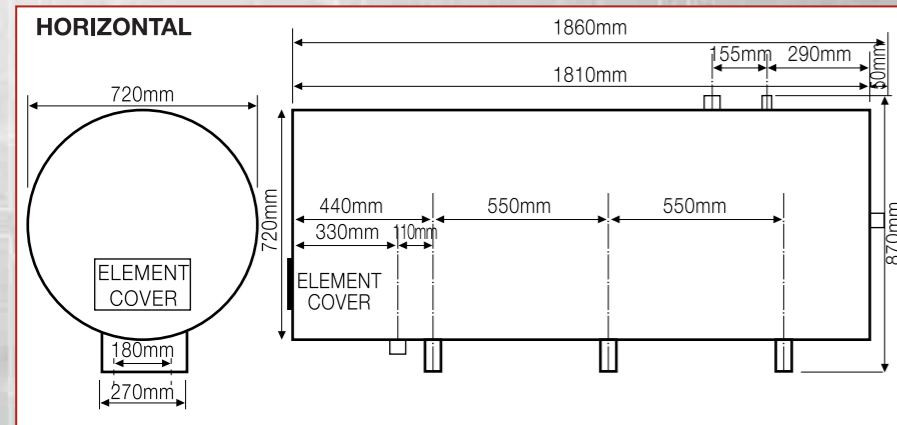product specification data


Product Code	Capacity (Litres)	Element Rating (Kw)	Operating Pressure (kPa)	Mass Empty (kg)	Connections (mm) (male iron)
MF 450V (vertical)	450	18	Up to 400	124	40
MF 450H (horizontal)	450	12	Up to 400	129	40

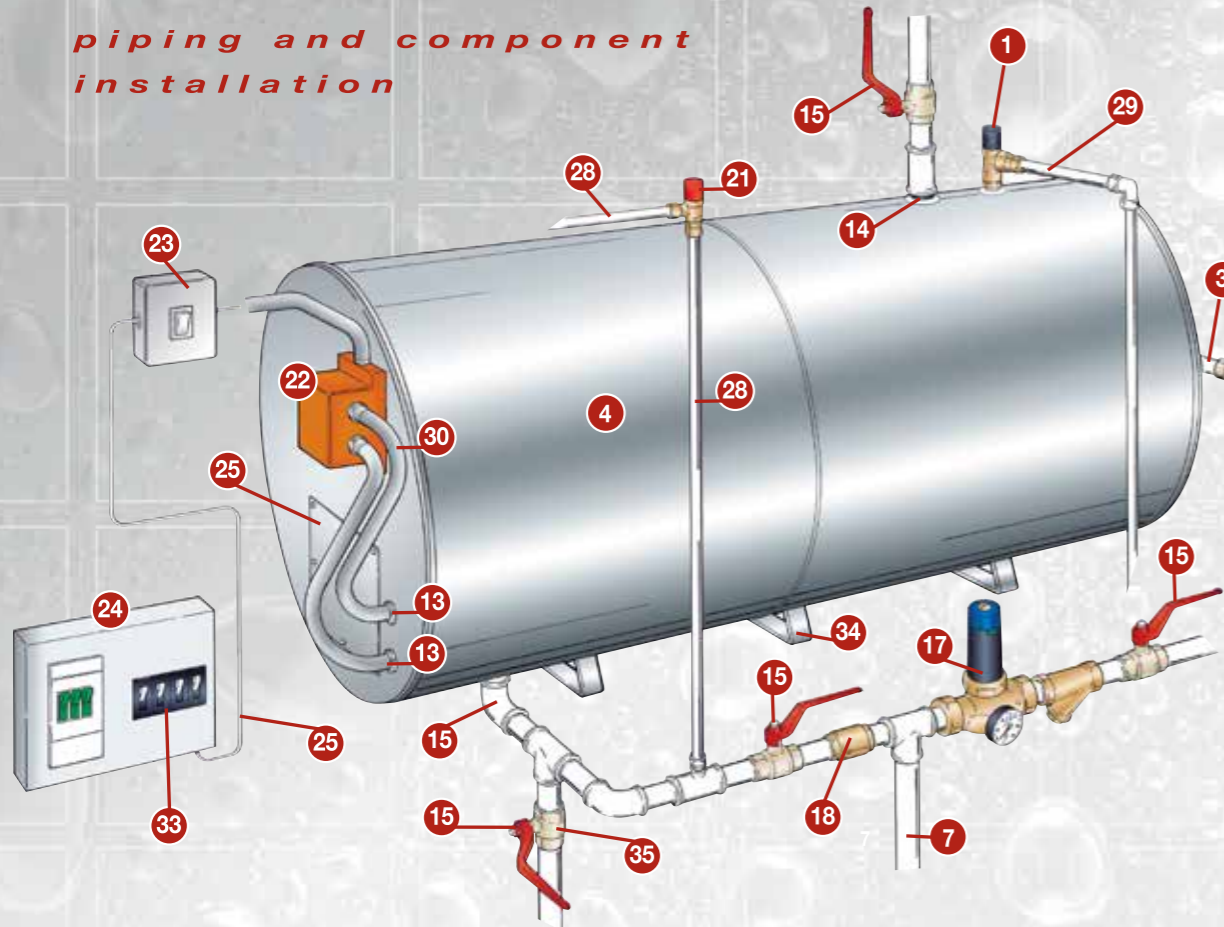pipng and component installation

Product Description

- Temperature & Pressure Safety Valve (400kpa)
- 4 X Sacrificial Anodes
- 40mm Return Connection
- 0,8mm Galvanised Sheet Steel
- Cold Water Inlet
- Floor Standing Base Ring For Vertical Only
- Balanced Cold Water Draw Off To Other Services
- 6 X 3kW Standard Immersion Elements (vertical only)
- VKF 7" Thermostat Set At 60° C
- Kwikot Thermostat Pocket
- Thermofused Porcelain Coating
- 50mm Polyurethane Foam Insulation
- 25mm Electrical Conduit Entry

product installation data


- The water heater must be installed under cover (inside or outside) and not exposed directly to climatic weather conditions.
- The following minimum installation clearance must be allowed for: 500mm clear space around the Safety Valve and for servicing the anodes.
- 300mm clear space immediately in front of the electrical cover plate.
- Do not wall mount.

product warranty and anode servicing

The period of guarantee is from the date of installation providing that documentation of proof of installation is furnished, or alternatively from date of manufacture as determined from the serial plate or date stamp code.

- One year on the standard immersion VKF7" elements, thermostat and flange assembly plate and gasket.
- Two years on the Safety Valve.
- Three Years on the inner cylinder, subject to water conditions equivalent to main Metropolitan supply authorities. This guarantee is subject to only genuine Kwikot replacement parts (element and thermostat etc) been used whilst the inner cylinder is still under guarantee.
- The guarantee on the installation is the responsibility of the installer. Water specification and Anode servicing/replacement is as follows:

Total Dissolved Solids (Parts per Million)	Recommended Anode Replacement
100-600	3 Years
601-1000	2 Years
Over 1000	1 Year

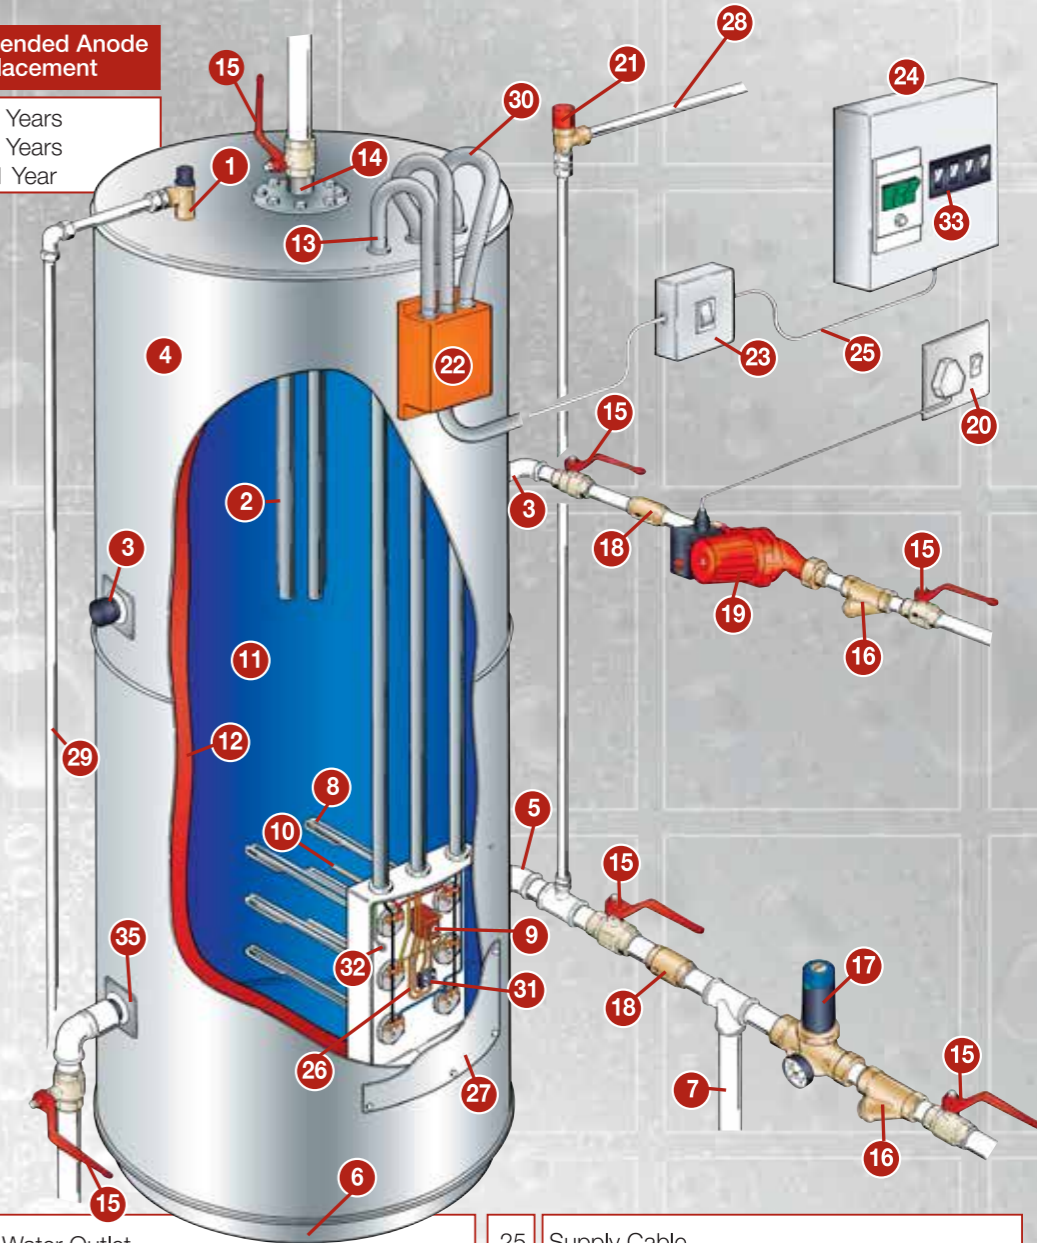

- 40mm Hot Water Outlet
- Isolating Lever-Ball Valve
- Strainer
- Pressure Reducing Valve With or Without Gauge
- Non-return Valve
- Inline Circulation Pump
- 15 Amp Wall Socket
- Expansion Relief Valve (400kPa)
- Contactor Switch
- 3 Phase Isolator
- Distribution Board (3 Phase)

- Supply Cable
- Thermostat Control Wires
- Electrical Cover Plate
- Expansion Overflow Pipe (metallic)
- Safety Overflow Pipe (metallic)
- Flexible Conduit
- Terminal Block
- Earth Stud
- 3-phase Circuit Breaker
- Kwikot Floor Bracket For Horizontal Cylinder
- Drain Connection



megaflo 450 litre

electric water heaters

standard fitted accessories

- Immersion elements.
- Fail-safe thermostat graduated between 30°C and 70°C.
- Flange plate with magnesium sacrificial anodes.
- Thermostat pocket.
- The safety valve (supplied fitted to water heater) is designed to release water if the pressure in the water heater approaches **400kPa** or if the temperature approaches 94°C. The safety valve is fitted with a 20mm male thread connection and the overflow is a 22mm Conex, which must be piped with a metallic overflow pipe to the exterior of the building.

additional installation components

A selection of Kwikot installation components available.



Basket Strainer-
15mm to 100mm



Lever Ball Valves-
15mm to 100mm

Pressure Reducing Valves-
15mm to 100mm
(150kPa to 600kPa)




Non Return Valves-
15mm to 100mm



Screwed-End Circulating Pumps-
various sizes available



electrical wiring diagrams

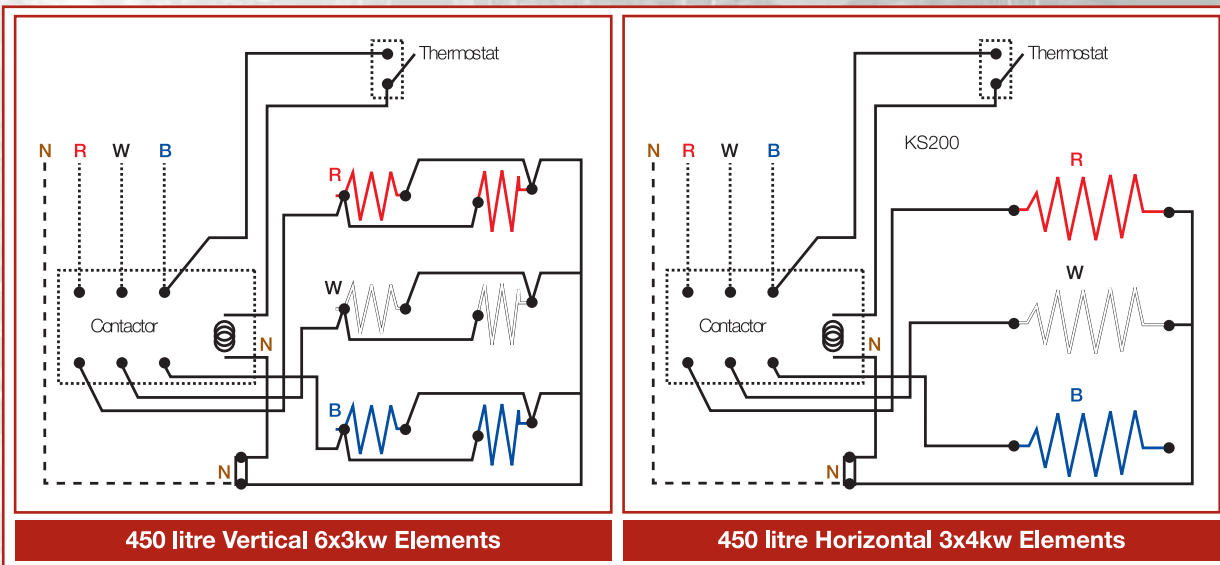

Electrolux SA (Pty) Ltd



www.kwikot.com

Inland

3 Aberdeen Road,
Industrial Sites,
Benoni
Tel: (011) 897 4600
Email:
Sales.Inland@electrolux.com
Sales.Export@electrolux.com

Eastern Cape

39-41 Leadwood Crescent,
Fairview,
Port Elizabeth
Tel: (041) 399 4000
Email:
Sales.Easterncape@electrolux.com

Western Cape

15 Purdey Road,
Sheffield Business Park, Phillippi,
Cape Town
Tel: (021) 690 2700
Email:
Sales.Westerncape@electrolux.com

Kwazulu-Natal

814 Peter Close,
Springfield Park,
Durban
Tel: (031) 574 8700
Email:
Sales.Kwazulunatal@electrolux.com

Support

Email:
Technical.Info@electrolux.com
Kwikot.MarketingInfo@electrolux.com