

**Trailed EVENFLOW® ORCHARD Mist Blowers (Rovic)**

**General Characteristics (Syncroflow® Technology)**

- Also suited for; Macadamia, Deciduous, Advocado, Mango etc
- Easy Access Service System (EASS®)
- Belly protection
- Double venturi agitation
- High quality CE approved polyethylene tank (Chemical, H<sub>2</sub>O & Hand wash)
- 1½" Suction Hose
- 80 Bar high pressure chemical resistant spray hose
- Class 6 PTO's with CVJ Type @ Tractor Interface
- Multi-wing composite fan
- Two speed Gearbox
- Stainless steel fan cowling

**Fan information (Tractor PTO @ 540rpm)**

Fan	Pitch	Low Gear (1:3) 1,620 rpm	High gear (1:4) 2,160 rpm
Ø940mm	28.5°	26,600 m <sup>3</sup> /hr	36,200 m <sup>3</sup> /hr
Ø940mm	38.5°	36,100 m <sup>3</sup> /hr	48,100 m <sup>3</sup> /hr


**PUMP: Comet APS-145 (140 L/min, 50 Bar)**



Stock Code	Model	Suggested Tract. kW	Control	EVENFLOW Turret	Clean water Tank	Handwash Tank	Track width	Flotation
RM10700	1500L Orchard Electric	45kW	Electric	Optional	116.4L	15.8L	1.35-1.65m	10.0/75R15.3
RM10800	2000L Orchard Electric		Electric	Optional	116.4L	15.8L	1.45-1.75m	10.0/75R15.3
RM10800-M	2000L Orchard Manual		Manual	Optional	116.4L	15.8L	1.45-1.75m	10.0/75R15.3
RM10850	3000L Orchard Electric	50kW	Electric	Optional	234L	15.8L	1.65-1.95m	10.5/80R18


**Optional equipment**

REF002	EVENFLOW® Turret
REF003	Fan Air Deflector
RM10975	Large tyre conversion kit (10.5/80R18) Factory fitted in Lieu of standard tyres (10.0/75R15.3)

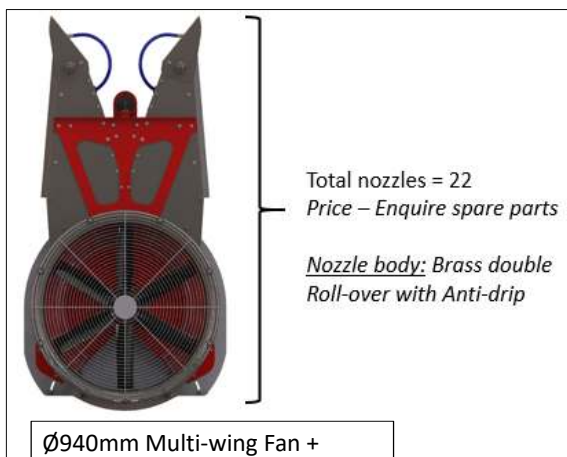

Ø940mm Multi-wing Fan +

Turret

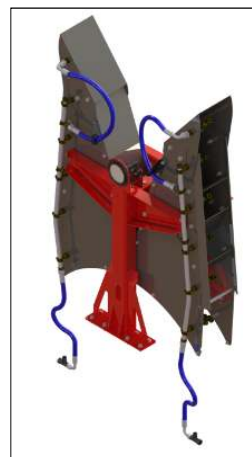

EVENFLOW® Turret



Fan Air Deflector

**Note**

\*All weights, measurements & specifications are approximate and subject to change without prior notification.